







P&LARIS

Think Outside

ABOUT US

GLOBAL MANUFACTURER
AUSTRALIAN & NEW ZEALAND SUBSIDIARY
NATIONAL SALES AND SERVICE NETWORK

- Polaris Australia & New Zealand is a fully-owned subsidiary of parent company and US powersports giant Polaris Inc (NYSE: PII), providing full sales and aftersales support to Australian and New Zealand customers.
- Polaris has a national network of franchised dealers covering all major locations across Australia & New Zealand.
- Polaris dealers are fully trained and capable of providing all local technical and service support.
- Polaris SxS are the number 1 selling brand in both Australia & New Zealand.





TABLI	E OF COI	NTENTS		
	All Sir			
		P	RANGE	
			Y	
			表行	

POLARIS INTERNATIONAL CORPORATE6	
POLARIS SAFETY & TECHNOLOGY8	
SHOP ON LINE9	
POLARIS SAFETY AND TECHNOLOGY10	
IS MID SIZE YOUR SIZE12	
POLARIS GOVT & DEFENCE, COMMERCIAL14	
''D UP - POLARIS' ELECTRIFICATION STRATEGY16	
PGA18	
TIPS ON SERVICE & MAINTENANCE26	
YOUTH	
RANGER 150 EFI 30	
RZR 200 EFI32	
AGRICULTURE/UTILITY	
RANGER SP 530 38	
RANGER 570 HD EPS ADC40	
RANGER SP 570 PREMIUM42 Ranger 1000 eps44	
RANGER 1000 PREMIUM 46	
RANGER XP 1000 HD EPS ADC 48	
RANGER DIESEL HD EPS ADC50	
RANGER XP 1000 NORTHSTAR PREMIUM52	
RANGER XP KINETIC PREMIUM54	
RANGER XP KINETIC ULTIMATE56 Ranger Crew Sp 570 premium58	
RANGER CREW 1000 PREMIUM 60	
RANGER CREW XP 1000 PREMIUM62	
RANGER CREW XP 1000 NORTHSTAR PREMIUM64	
COMMERCIAL/UTILITY	
PRO XD DIESEL AWD EPS70	
PRO XD FULL SIZE DIESEL CREW72	
RANGER XP KINETIC PREMIUM54	
RANGER XP KINETIC ULTIMATE56	
WORK AND PLAY	
GENERAL 1000 SPORT76 General XP 1000 Sport78	
GENERAL XP 4 1000 SPORT 80	
SPORT/RECREATIONAL	
RZR TRAIL SPORT - 50"86	
RZR TRAIL S 1000 PREMIUM - 60"88	
RZR XP 1000 SPORT - 64"90 RZR PRO XP SPORT - 64"92	
RZR PRO XP ULTIMATE - 64"94	
RZR XP 4 1000 PREMIUM EPS – 64"96	
RZR PRO XP 4 SPORT - 64"98	
RZR PRO XP 4 ULTIMATE – 64"100 RZR TURBO R SPORT – 74"110	
RZR TURBO R ULTIMATE - 74"110	
RZR TURBO R 4 ULTIMATE- 74"114	
RZR PRO R ULTIMATE – 74"116	
RZR PRO R 4 ULTIMATE – 74"118	
SPECIFICATIONS122	

RΕ۱



PERLARIS 2023



YOUTH



RANGER 150 EFI



RZR 200 EFI



AGRICULTURE/UTILITY



RANGER SP 530



RANGER 570 HD EPS ADC



RANGER SP 570 PREMIUM



RANGER SP 570 NORTHSTAR



RANGER 1000 EPS



RANGER 1000 PREMIUM



RANGER XP 1000 HD EPS ADC



RANGER DIESEL HD EPS ADC



RANGER XP 1000 NORTHSTAR PREMIUM



RANGER XP KINETIC PREMIUM



RANGER XP KINETIC ULTIMATE



RANGER CREW SP 570 PREMIUM



RANGER CREW SP 570 NORTHSTAR



RANGER CREW 1000 PREMIUM



RANGER CREW XP 1000 PREMIUM



RANGER CREW XP 1000 NORTHSTAR PREMIUM

COMMERCIAL/UTILITY



PRO XD DIESEL AWD



PRO XD DIESEL CREW AWD



RANGER XP KINETIC PREMIUM



RANGER XP KINETIC ULTIMATE

WORK AND PLAY



GENERAL 1000 SPORT



GENERAL XP 1000 SPORT



GENERAL XP 4 1000 SPORT

SPORT/RECREATIONAL



RZR TRAIL SPORT - 50"



RZR TRAIL S 1000 PREMIUM - 60"



RZR XP 1000 SPORT - 64"



RZR XP 4 1000 PREMIUM EPS - 64"



RZR PRO XP SPORT EPS - 64" RZR PRO XP ULTIMATE - 64" RZR PRO XP 4 SPORT - 64"







RZR PRO XP 4 ULTIMATE - 64"



RZR TURBO R SPORT - 74"



RZR TURBO R **ULTIMATE - 74"**



RZR PRO R ULTIMATE - 74"



RZR TURBO R 4 ULTIMATE - 74"



RZR PRO R 4 ULTIMATE - 74"



POLARIS AT A GLANCE

Founded: 1954 in Roseau, MN, USA



2021 Sales: **\$8.2** Billion



Polaris is a global leader in the powersports and outdoor recreation industries. Driven by innovation, we offer a diverse portfolio of best-in-class brands that reflect our pioneering approach to help our customers work and play outdoors.

Please Note: Not all brands and products are available in Australia.


For Australia Product Range - www.polarisaustralia.com
For International Corporate Product Range - www.polaris.com



Employees: Nearly 15,000 Globally



Countries Served:

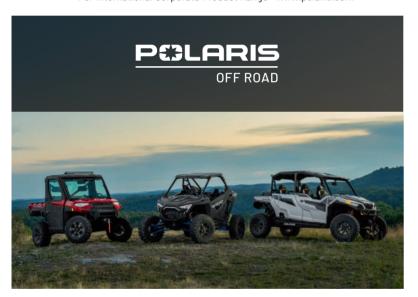























USING YOUR SXS VEHICLE

SAFELY

A message from Polaris about how to use your SxS vehicle safely.

Polaris has engineered the most capable utility and recreational off-road vehicles packed with safety technology such as Engineered Roll Over Protection (ROPS) Roll Cages, Active Decent Control (ADC), True On Demand All Wheel Drive and more. However when operating a side by side vehicle off-road, the Driver/User and passengers must ensure that they operate the vehicle safely. Here are a few Tips and Hints on how to enjoy your Side by side vehicle safely.

TIPS



Always wear a seat belt.

Most injuries occur from passengers
or limbs being ejected from the vehicle
during an accident. Seat belts are your
best friend.



An appropriate helmet is recommended for all occupants (Driver & Passengers). The more passengers in a vehicle, the more likelihood of "head to head" impacts.



- Be aware of HIGH RISK situations such as sloping and hilly Terrain.
- Slow is best when navigating hilly or obstructed terrain.
- In these higher risk situations always use LOW RANGE.



 Overloading - Your Polaris is designed to carry a certain maximum load (which varies from model to model). Never exceed the maximum load and remember a loaded vehicle may handle and respond differently to an empty vehicle.



- Be aware of your vehicle condition.
In particular it is a good habit throughout
your driving day to visually check that your
tyres are correctly inflated and you have
not picked up a puncture or have a partially
inflated tyre. Correct tyre pressures are
important for traction and handling.



THINK OUTSIDE SHOP ONLINE



www.shoppolaris.com.au



Your 24/7/365 online Accessory & Merchandise store. Browse - Order - Deliver straight to your door.









BAG OGIO 9800 RIG ROLLER



POLARIS WATER BOTTLE -



MEN'S SOFTSHELL JACKET -BLUE/ORANGE



BZR PATCH HAT -GRAV/BLUE



WITH ANTI-SCRATCH LENS, BLACK











WATCH NOW

POLARIS SAFETY AND TECHNOLOGY

YOUTH VEHICLES

Our youth models are pact with safety features and benefits such as roll cages, seat belts, two free helmets, geofencing technology, password protected safe start, digital speed limiting, seat belt interlocking system and all-new helmet aware technology.



SPEED CONTROL & GEOFENCING TECHNOLOGY

The Speed Control & Geofencing Technology accessory kit keeps vehicle operators safe by controlling maximum speed in specified operating areas and can be programmed via the Polaris Ride Command app.





FREE HELMETS:

To promote safe riding practices, Polaris offers 2 free helmets with the purchase of every RANGER SxS vehicle.



ACTIVE DECENT CONTROL

Active Decent Control (ADC) is a game-changer in steep terrain. When you're driving down a slippery or steep hill, engaging ADC will optimize vehicle grip so you can descend with confidence.

TRUE ON-DEMAND AWD

Polaris' fast-engaging, True On-Demand AWD is a cut above the rest. Get the traction you need, when you need it, for rough terrain.





RIDE COMMAND

Ride Command keeps you connected, even without a signal. Through the in-dash display, you can access your maps and location and send messages to your group via Group Ride Messaging. With other features like an integrated rear camera, we're always looking for ways to improve safety through technology.



VEHICLES ENGINEERED WITH SAFETY IN MIND

Polaris SxS vehicles are designed with safety in mind. The youth models are equipped with a Full Protective Cage and all Adult models with a Certified Roll Over Protection System (ROPS), seat belts or harnesses, and doors or nets with full door systems available.



"Is Mid Size Your Size"




Mid-Size means it's a little shorter and a little narrower than the full-sized 3-seat range, but that also means it's more nimble, more manageable and more manoeuvrable.



WATCH NOW

WE ALL CAN HELP CREATE MORE LAND ACCESS FOR SXS DRIVING

JOIN AORVA TODAY - IT'S FREE TO JOIN

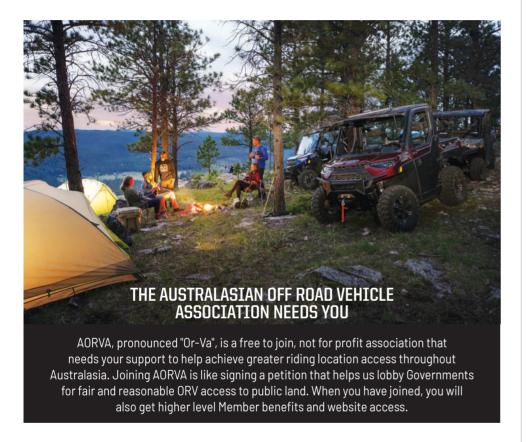

By joining the Australasian Off Road Vehicle Association your membership ads weight to our efforts to gain more access to both private and public land for SxS Recreational driving.

PLEASE JOIN AORVA TODAY



To find out more and become a member please visit

www.aorva.com.au

CREATE YOUR OWN MEMORIES IN THE GREAT AUSSIE OUTDOORS

POLARIS, FAMILY & MATES

DRIVING MEMORIES MONEY CAN'T BUY



"I couldn't put a value on the time I spend with mates & my family In a remote Aussie bush setting"







WATCH NOW






CORPORATE FLEET PROGRAM

Benefits:

- The biggest and best range of utility vehicles
- Petrol, diesel and electric power sources
- 2, 3, 4 and 6 seat models with Certified Roll Over Protection Systems (ROPS)
- Large range of Polaris engineered accessories for safety, comfort and functionality
- Fleet discounts on vehicles, accessories and service parts
- Expertise and service from a qualified national dealer network

Contact us today: info@polariscommercial.com.au

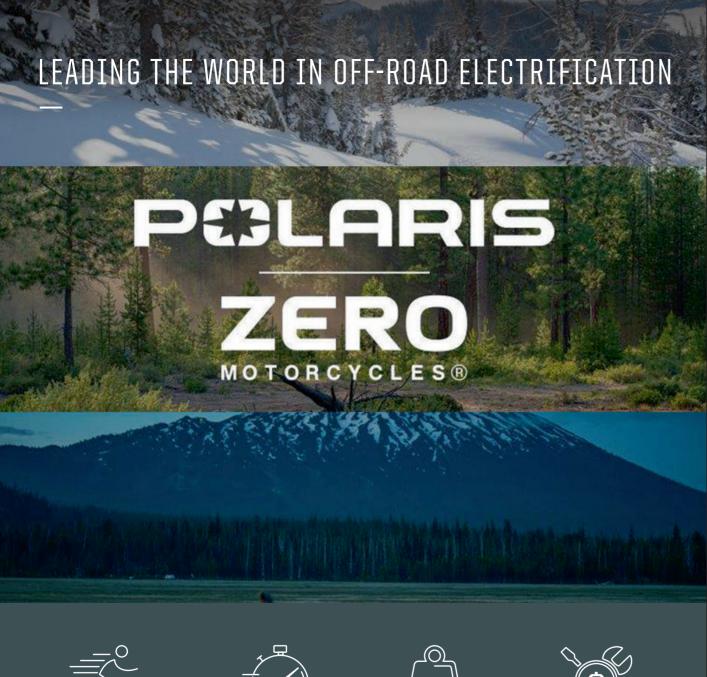



ULTRA-QUIET RIDE



INSTANT ACCELERATION



TOW HEAVY PAYLOADS



LOWER COST TO MAINTAIN

ELECTRIC ADVANTAGES

In 2020, Polaris announced a 10-year exclusive partnership with Zero Motorcycles – a global leader in electric motorcycle powertrains and technology – to co-develop electric vehicles as part of Polaris' rEV'd up electrification strategy. Polaris aims to offer customers an electric vehicle option within each core product segment across off-road vehicles and snowmobiles by 2025.

This isn't electrification for electrification's sake. We're always leading the charge, exploring new technologies to drive innovation off-road, with high-performance electric powertrains creating a way to unlock the potential of what you do outdoors. It's allowed us to design vehicles with more power and more torque to make the most capable SxS ever built. Period.

The first new model from this collaboration is the 2022 Ranger XP Kinetic.

THINGS YOU'LL NEVER DO AGAIN



BUY PETROL



CHANGE ENGINE OIL



CHANGE FUEL FILTER



REPLACE SPARK PLUGS



CHECK EXTERNAL FUEL HOSES



CHANGE AIR FILTER





GENUINE PARTS & ACCESSORIES





- 1. Glass tip out screen #2889031
- 2. Bull bar and side rail kit #AUST548
- 3. Poly half door #2882559
- 4. Tip down Headache rack #2881531
- 5. Premium poly sport roof #2882912
- 6. Poly rear panel #2883773
- 7. Pro Armor 81cm single-row light bar #2884299



- 7. Polysport roof #2883236
- 8. Cargo max system #2882177
- 9. Rear poly panel #2879812
- 10. Rear brushquard #2879972
- 11. Pro Armor 25cm dual row light bar #2882075
- 12. Work beacon led light #2883265

FOR YOUR COMFORT, SAFETY **PROTECTION**





ACCESSORY IDEAS RANGER 1000 EPS

- 1. Premium poly sports roof #2882912
- 2. Tip out windscreen #2889013
- 3. Poly rear panel #2883773
- 4. Steel half doors #AUST508
- 5. Scrub bar and side rail kit #AUST555 6. Work beacon led light #2883265
- 7. Ranger snorkel kit #AUST403



RANGER XP 1000 CREW NORTHSTAR ACCESSORY IDEAS

- 1. Crew Poly sports roof #2883274
- 2. Full glass windshield #2889030

1. Steel half doors #AUST510

2. Tip out front screen #2881784

5. Canvas seat covers #P7720

6. Front brushquard #2879973

4. Pro Armor attack tyres #5415613

3. Matte black six'r allov rims #1521507-521

- 3. Windshield wiper kit #2883974
- 4. 76cm Pro Armor dual row light bar #2882074
- 5. 25cm Rear-facing Rigid light bar #2883123
- 6. Crew Rock guard with step #2883398
- 7. Poly front doors #2882561
- 8. Poly rear doors #2883437
- 9. 2,041kg Pro heavy duty winch #2882711
- 10. Front hood storage rack #2882690
- 11. Rear cargo max system #2882177



Mark Larkham talks about Polaris Genuine Accessories.

POLARIS GENUINE ACCESSORIES

"GET MORE DONE"
-Mark Larkham



Polaris Off-Road Vehicle Doors





/Polaris Australia

Polaris Off-Road Vehicle Windscreens





/Polaris Australia

Polaris Off-Road Vehicle Roofs





🔼 /Polaris Australia



Polaris' innovative LOCK & RIDE system allows for the quick and easy fitment and exchange of a wide selection of different accessories.

Most accessories using the LOCK & RIDE system do not require tools for accessory fitment.

Simply use the LOCK & RIDE toggle system to quickly remove and refit different accessories for different work tasks.

POLARIS LOCK & RIDE - GET MORE DONE

LARKO EXPLAINS LOCK & RIDE





WATCH NOW



THE TIGHTEST SEALING CAB

With the profile channels engineered into the roll cage, body plastics molded to seal and cab accessories designed to keep the elements out, the RANGER Pro Shield™ Cab System offers an industry-leading, 3x better






PLUG & PLAY ELECTRICAL

A revolution in electrical accessory integration, the Polaris Pulse™ Electrical System allows for a simple plug & play approach for adding power to Polaris Engineered Accessories™.

LOCK & RIDE

CARGO BOX

Lock & Ride® mounting locations allow for limitless customization to let you work the way you want.

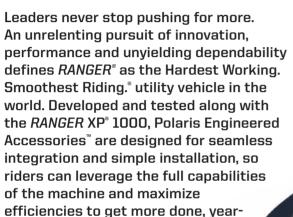

FOR MORE

ENGINEERED



INTEGRATED WINCH

round.

Designated mounting points and pre-wired contactors ensure a perfect fit and the strongest place to attach the Polaris Engineered™ winch - the most dependable winch for your RANGER®. With wiring built right into the vehicle, we made this the easiest RANGER® winch ever made to install.











BRING IT ALL. BRING IT ON.

From opposite sides of the globe, the most capable machines in the off-road world meet a trusted outdoor adventure brand to deliver industry-exclusive, purpose-built roof racks, bed racks and accessories to help Polaris RANGER and GENERAL users have more fun and get more done. Increase storage capacity so you can go where you want with everything you need, organized to succeed.



RANGER



ROOF OR RED RACK

Rust-resistant Rhino-Rack® rack systems are designed to fit with ease onto your RANGER.



ATTACH WITH MOUNT

Mounts are required to install bed and roof racks on your RANGER. Some assembly is required.



ADD ACCESSORIES

Pack more into your adventure ahead with a broad range of superior-quality Rhino-Rack® accessories.



READY TO RIDE!

Whether you're on the trail of work or play, Polaris and Rhino-Rack® will help you stay prepared for whatever the day may bring.

GENERAL



BED RACK

Rhino-Rack's® rust-proof storage system allows you to mount to the bed of your vehicle for maxi mum storage. Mounts are included.



ADD ACCESSORIES

Pack more into your adventure ahead with a broad range of superior-quality Rhino-Rack® accessories.



READY TO RIDE!

Whether you're on the t rail of work or play,
Polaris and Rhino-Rack® will help you stay prepared for
whatever the day may bring.

TIPS ON SERVICE & MAINTENANCE

PREVENTATIVE
MAINTENANCE IS THE
BEST KIND OF MAINTENANCE

Most Polaris drivers are using their vehicle for work or play. In either circumstance, you don't want to be let down at the most inconvenient time. The better you maintain your Polaris, the more reliable it will be. Here are a few tips to ensure you get the very best Polaris reliability always.

UTILITY/WORKING ENVIRONMENT

If you are using your Polaris in a work environment, you might be surprised just how quickly you clock up the hours on the vehicle. There are certain key parts that need to be inspected and maintained more regularly for the very best performance and reliability.

It's recommended that regular inspection and maintenance where needed is carried out on

- FLUID LEVELS
 Check Water and Engine Oil levels every week
- WEAR PARTS
 Check Tyres for signs of damage or underinflation daily
 Check Air filter and replace more regularly if operating in Dry & Dusty conditions

RECREATIONAL DRIVING

If you use your Polaris for Sport/Recreation, you may not use it on a regular basis with time gaps in between. To avoid disappointment when you get out to your driving destination, its recommended to always check the following items a couple of days in advance:

- Battery charge.
- Tyre inflation and condition.
- Fluid levels particularly Water and Engine Oil.
 If low levels are detected check for leaks.
- Brake pedal pressure.
- Start up the engine and let it warm up for 5 minutes then check for leaks.

THE POLARIS OWNERS MANUAL OUTLINES RECOMMENDED MAINTENACE & SERVICE INTERVALS FOR EACH MODEL. YOUR POLARIS DEALER CAN PROVIDE ADVICE SPECIFICALLY RELATING TO YOUR PARTICULAR DRIVING CONDITIONS AND OPERATION. AT LEAST ANNUALLY, OR PER THE SERVICE INTERVALS (HOURS/KLMS) ADVISED, YOUR POLARIS DEALER SHOULD PERFORM A THOROUGH INSPECTION AND SERVICE.

THE BETTER YOU MAINTAIN YOUR VEHICLE THE MORE RELIABLE IT WILL BE



YOUR LOCAL POLARIS DEALER

YOUR LOCAL POLARIS EXPERT - WILL STEER YOU RIGHT

LOCAL KNOWLEDGE & SUPPORT BACKED UP BY AUSTRALIA'S #1 SELLING SXS BRAND

Your local Polaris Dealer is usually an independently owned business with significant experience in the local area. Most likely your Polaris Dealership is a family business which is often been in operation for two or more generations.

Your Polaris Dealer has made a significant investment in training, staff and resources to be able to provide our customers with the very best in after sales service and support.

YOUR LOCAL POLARIS DEALER OFFERS:

- Service Technicians that are fully trained and certified by the University of Polaris.
- Online Technical and Warranty support from the Polaris Technical Centre.
- Fully trained sales staff who know the local area and operating conditions and which is the best Polaris vehicle to recommend for your needs.
- A complete range of new vehicles (stock availability permitting).
- A comprehensive inventory of the most common service/ maintenance parts.
- A representative range of Genuine Polaris Engineered Accessories to fit your vehicle and meet your needs that allows you to GET MORE DONE in safety and comfort.
- Some Dealers offer Pickup and Delivery services. Costs may apply.











YOUTH MODELS



RANGER 150 EFI



RZR 200 EFI





RANGER 150 EFI



Colour Options



Avalanche Gray











4 STROKE ENGINE - 150CC

ELECTRIC START

POLARIS VARIABLE TRANSMISSION

DAYTIME LED RUNNING LIGHTS

ELECTRONIC **FUEL** INJECTION



4 WHEEL

HYDRAULIC

DISC





RIDE COMMAND WITH GEOFENCING AND SPEED

LIMITING CONTROL



PASSCODE **PROTECT**



TWO APPROVED YOUTH HELMETS



REVERSE GEAR

ENGINE & DRIVETRAIN

Displacement / Engine Type	150cc / 4-Stroke Single Cylinder EFI

Drive System Type 2WD

SUSPENSION

I \vdash

>

	Front Suspension	Single A-Arm with 13 cm Trave
--	------------------	-------------------------------

Rear Suspension	Dual Shock Swingarm	with 15.2 cm Travel

Front Tyres 22 x 7-10 Wanda

22 x 10-10 Wanda Rear Tyres

Stamped Steel Wheels

DIMENSIONS

Bed Box Dimensions	53.3 x 106.7 x 12.7 cm
$(L \times W \times H)$	

9.5 L Fuel Capacity

Ground Clearance 20.3 cm

Vehicle Size (L x W x H) 215.9 x 121.9 x 147.3 cm

170 kg Payload Capacity

Box Capacity 22.7 kg

Wheelbase 165.1 cm

Estimated Dry Weight 305 kg

ADDED FEATURES

Other Standard Features

Seat Belt, Safety Flag, Safety Nets, Full Protective Cage 2 Youth Helmets, Training DVD, Youth Ride Control (Pin Code Start, Adjustable Speed Limiter, Geofencing,

Helmet Aware).

The speed of this vehicle is restricted to under 26 km/h at manufacture. The speed limiting device may be adjusted by supervising adults when they determine that their child is capable of handling additional speed. The unrestricted top


speed for this model is 46 km/h

Age Limit

Speed Limiter

Suitable for ages 10 and over



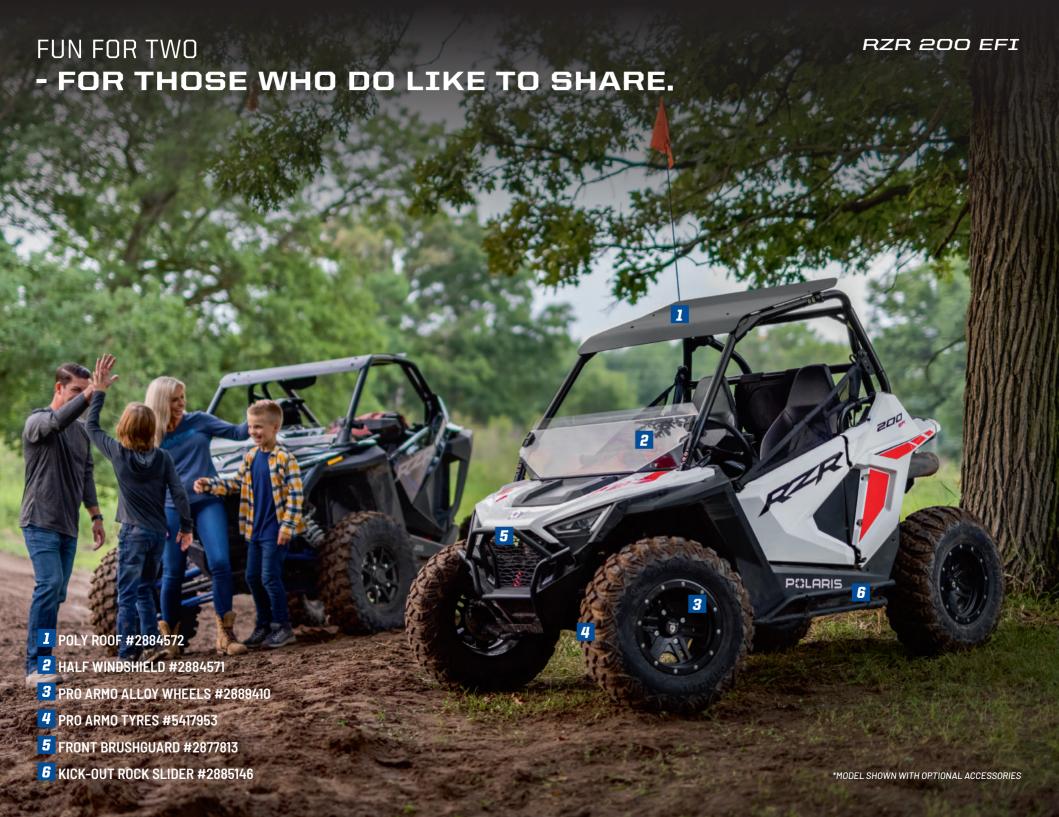



RZR 200 EFI



Colour Options



White Lightning/Indy Red













4 STROKE ENGINE - 180CC

ELECTRIC START

POLARIS VARIABLE TRANSMISSION

SAFETY FLAG

ELECTRONIC FUEL INJECTION



4 WHEEL

HYDRAULIC

DISC







RIDE COMMAND WITH GEOFENCING AND SPEED LIMITING CONTROL



PASSCODE **PROTECT**



TWO APPROVED YOUTH HELMETS



HELMET AWARE **TECHNOLOGY**

ENGINE & DRIVETRAIN

Displacement / Engine Type	180cc / 4-Stroke Single Cylinder EFI
Drive System Type	2WD

SUSPENSION

Drive System Type

I \vdash

0 >

Front Suspension	Dual A-Arm with 17.8 cm Travel

Rear Suspension	Independent Rear Suspension with 17.8 cm
Real Suspension	Travel

 551.5.5.1	T	r	ć	3

Front Tyres 24 x 8 - 12 CST

Rear Tyres	24 x 10 - 12 CST

Wheels Stamped Steel

DIMENSIONS

Bed Box Dimensions	41.9 x 48.3 x 10.1 cm
$(L \times W \times H)$	

Fuel Capacity	9.5 L
ruer Capacity	9.0 L

25.4 cm **Ground Clearance**

Vehicle Size (L x W x H) 225.6 x 121.9 x 151.2 cm

Payload Capacity 170 kg

Box Capacity 22.7 kg

Wheelbase 165.1 cm

Estimated Dry Weight 334 kg

ADDED FEATURES

	Digital Display with Gear Indicator,			
	Odometer, Trip Meter, Voltage, Engine			
Instrumentation	Temperature, Engine Hour Interval, Ground			
	Speed, Engine RPM, Youth Ride Command			
	(Speed Limiting, Geofencing, Helmet Aware)			

Seat Belt, Safety Flag, Safety Nets, Full

Protective Cage,

Other Standard Features 2 Youth Helmets, Training DVD, Youth Ride

Control (Pin Code Start, Adjustable Speed Limiter, Geofencing, Helmet Aware).

LED Running Lights, Single Rear Lighting

Breakelight/Taillight





RANGER 150 EFI




RZR 200 EFI

DARE TO COMPARE

COMPARE THE FACTS	RANGER 150 E	FI	RZR 200 E	FI
HELMET	Yes	/	Yes	/
SAFETY FLAG	Yes	/	Yes	1
SAFETY TETHER	Yes	/	Yes	1
SPEED LIMITER	Yes	/	Yes	1
HEADLIGHTS	Yes	/	Yes	/
ENGINE CAPACITY (CC)	150cc		180cc	1
ELECTRONIC FUEL INJECTION (EFI)	Yes	/	Yes	/
ELECTRIC START	Yes	/	Yes	/
TRANSMISSION	Automatic	/	Automatic	1
REVERSE GEAR	Yes	/	Yes	1
SUSPENSION TRAVEL FRONT/REAR (MM)	130 / 152		178 / 178	1
RIDE COMMAND WITH GEOFENCING	Yes	/	Yes	/
ROLL OVER PROTECTION STRUCTURE	Yes	/	Yes	/
ADJUSTABLE STEERING WHEEL	Yes	/	Yes	/
ADJUSTABLE DRIVER SEAT	Yes	/	Yes	/

THERE ARE NO COMPETITORS



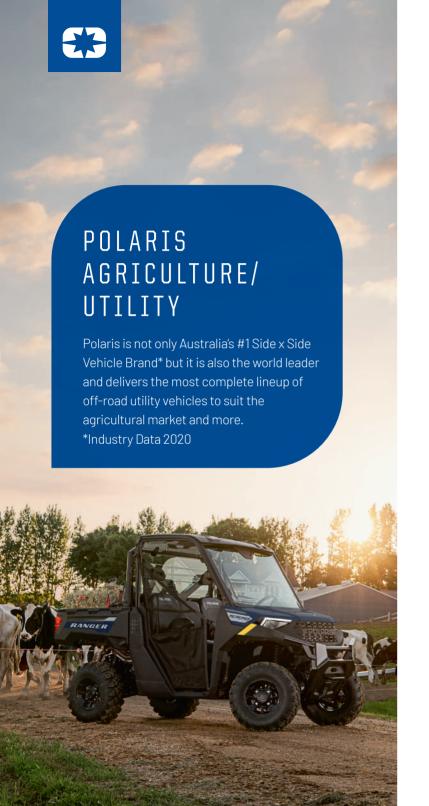

CHOOSE YOUR

AGRICULTURE/UTILITY MODELS

RANGER SP 530



RANGER 570 HD EPS ADC



RANGER SP 570 PREMIUM



RANGER SP 570 NORTHSTAR



RANGER 1000 EPS



RANGER 1000 PREMIUM



RANGER XP 1000 HD EPS ADC



RANGER DIESEL HD EPS ADC



RANGER XP 1000 NORTHSTAR PREMIUM



RANGER XP KINETIC PREMIUM



RANGER XP KINETIC ULTIMATE



RANGER CREW SP 570 PREMIUM



RANGER CREW SP 570 NORTHSTAR



RANGER CREW 1000 PREMIUM



RANGER CREW XP 1000 PREMIUM



RANGER CREW XP 1000 NORTHSTAR PREMIUM



BIG PERFORMANCE. SMALL FOOTPRINT.





RANGER SP 530



Colour Options



Sage Green







ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



IRS WITH 25.4CM OF TRAVEL



SEAT BELT INTERLOCK



SPEED KEY READY



680KG TOWING CAPACITY



DUMP BOX CAPACITY - 227KG

ENGINE & DRIVETRAIN

Displacement / Engine Type	567cc / 4-Stroke Single Cylinder DOHC EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

>

H

IL

 \vdash

. N / 3

GRICULTUR

⋖

Front Suspension	MacPherson Strut 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	25 x 8-12; Carlisle 489
Rear Tyres	25 x 10-12; Carlisle 489
Wheels	Stamped Steel

DIMENSIONS

Bed Box Dimensions (L x W x H)	84.6 x 123.7 x 31.2 cm
Fuel Capacity	35.9 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	274.3 x 142.2 x 188 cm
Payload Capacity	453 kg
Box Capacity	227 kg
Wheelbase	185.4 cm
Estimated Dry Weight	525 kg

ADDED FEATURES

Instrumentation	Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet
Other Standard Features	Gas Assist Dump Box, Single Latch Tailgate, Rearmounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 340 CCA Battery, 660W Charging System (Stator), 20.25 Gal. Onboard Storage with Enclosed Dash Bins and Integrated Cell-phone Holder, Sealed Suspension Bushings and Wheel Bearings, Steel Front Bumper With Winch Mount and Bull Bar, Rear Wheel Liners

4" LCD Rider Information Center: User Selectable Blue/

Red Backlighting & Brightness, Programmable Service

Lighting 55W Headlight, LED Taillamps





RANGER 570 HD EPS ADC



Colour Options









ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



IRS WITH 25.4CM OF TRAVEL



SEAT BELT INTERLOCK



SPEED KEY READY



ENGINE BRAKING SYSTEM & ACTIVE DESCENT CONTROL (ADC)



DUMP BOX CAPACITY - 227KG

ENGINE & DRIVETRAIN

Displacement / Engine Type	567cc / 4-Stroke Single Cylinder DOHC EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

ΗI

Н

E/U

 α

GRICULTU

4

Front Suspension	MacPherson Strut 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	25 x 8-12; Carlisle 489
Rear Tyres	25 x 10-12; Carlisle 489

Aluminum Black Xcelerator

DIMENSIONS

Wheels

Bed Box Dimensions (L x W x H)	81 x 117 x 29 cm
Fuel Capacity	34.1 L
Ground Clearance	25.4 cm
Vehicle Size (L x W x H)	279 x 147 x 185 cm
Payload Capacity	454 kg
Box Capacity	227 kg
Wheelbase	185.4 cm
Estimated Dry Weight	499 kg

Instrumentation	Single Analog Dial with 2" LCD Rider Information Center, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Volt Meter, Service Indicator and Codes, Seatbelt Reminder Light, DC Outlet
Heavy Duty	Upgraded Rear Driveshaft, Grease Nipples, HD Sway Bar, Sealed Suspensions Bushings, Sealed Ball Joints, Driveshaft Spline Seals
Lighting	50W Headlight, LED Tail





RANGER SP 570 PREMIUM



Colour Options









ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



IRS WITH 25.4CM OF TRAVEL



SEAT BELT INTERLOCK



ELECTRONIC POWER STEERING



680KG TOWING CAPACITY



DUMP BOX CAPACITY - 227KG

ENGINE & DRIVETRAIN

Displacement / Engine Type	567cc / 4-Stroke Single Cylinder DOHC EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

 \vdash Н

Н

. | | Ш

 \square \supset \vdash \supset O Н α Ü

4

Front Suspension	MacPherson Strut 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	25 x 8-12; Carlisle 489
Rear Tyres	25 x 10-12; Carlisle 489
Wheels	12" Black Aluminum

DIMENSIONS

Bed Box Dimensions (L x W x H)	84.5 x 124 x 31.2 cm
Fuel Capacity	35.9 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	274.3 x 142.2 x 188 cm
Payload Capacity	420 kg
Box Capacity	227 kg
Wheelbase	185.4 cm
Estimated Dry Weight	564 kg

Instrumentation	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter
Other Standard Features	Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator)
Lighting	High/Low Beam LED Headlights LED Taillamps





RANGER 1000 EPS



Colour Options



Pursuit Camo







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 454KG



SEAT BELT INTERLOCK





ELECTRONIC POWER STEERING

ELECTRONIC FUEL INJECTION

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder SOHC EFI
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

Dual A-Arm 25.4 cm Travel

SUSPENSION Front Suspension

>

 \vdash Н

 $\overline{\mathsf{H}}$

. |-Ш

 \square

 \supset

ULT O Н α Ö

4

Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	25 x 10-12; Carlisle 489
Rear Tyres	25 x 11-12; Carlisle 489
Wheels	Stamped Steel

DIMENSIONS

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel Capacity	43 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	305 x 158 x 193 cm
Payload Capacity	680 kg
Box Capacity	454 kg
Wheelbase	206 cm
Estimated Dry Weight	674 kg

ADDED FEATURES

Instrumentation	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet
Other Standard Features	Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port
Lighting	Halogen Headlamps, 55W Low Beam, 60W

High Beam, Dual LED Taillamps





RANGER 1000 PREMIUM



Colour Options Springfield Blue









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 454KG



SEAT BELT INTERLOCK



ELECTRONIC POWER STEERING



IRS WITH 25.4 CM OF TRAVEL



ELECTRONIC **FUEL INJECTION**



POLARIS PRO HD 4,500 LB. WINCH

ENGINE & DRIVETRAIN

>

 \vdash Н

Н

E/UT

 \square \supset

ULTI

O Н α Ü ⋖


Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder SOHC EFT
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION	
Front Suspension	Dual A-Arm 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	26 x 9-12; PXT 2.0
Rear Tyres	26 x 11-12; PXT 2.0
Wheels	Aluminum Black Xcelerator 2.0

DIMENCIONO

93.3 x 137.8 x 31.75 cm
43 L
31.8 cm
305 x 158 x 193 cm
680 kg
454 kg
206 cm
674 kg

ADDED LEVIONES	
Other Standard Features	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet
Speed Limiter	Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position), Standard In- Dash SAE Charge Port
Age Limit	Dual LED Headlamps, 600lm Low Beam, 1000lm High Beam, Dual LED Taillamps

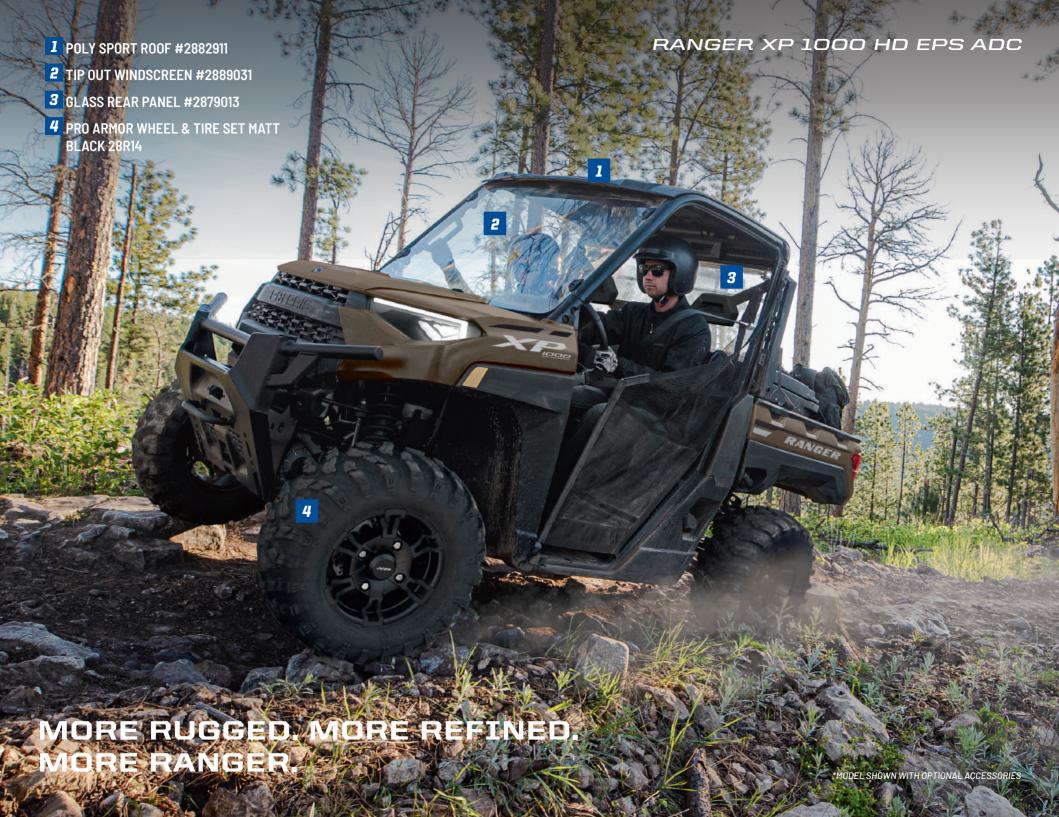



RANGER XP 1000 HD EPS ADC



Colour Options



Bronson Rock Smoke







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 454KG



SEAT BELT INTERLOCK



ELECTRONIC POWER STEERING



HANDBRAKE



ELECTRONIC **FUEL INJECTION**



8 PLY RATED

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder DOHC EFI
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

 \vdash Н

Н

. |-

Ш \square \supset \vdash \supset O Н α Ö 4

0001 EN0101	
Front Suspension	Dual A-Arm 27.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 27.9 cm Travel
Front Tyres	27 x 9-14; Pro Armor X-Terrain
Rear Tyres	27 x 11-14; Pro Armor X-Terrain
Wheels	14" Aluminum

DIMENSIONS

Bed Box Dimensions

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel Capacity	43.5 L
Ground Clearance	33 cm
Vehicle Size (L x W x H)	305 x 158 x 196 cm
Payload Capacity	680 kg
Box Capacity	454 kg
Wheelbase	206 cm
Estimated Dry Weight	737 kg

ADDED FEATURES

Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 1 DC Outlet, 1 USB Charge Port
Other Standard Features	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents, Polaris Pulse Electrical

System (6 position), Standard In-Dash SAE

Charge Port, NFC Front Badge





RANGER DIESEL HD EPS ADC



Colour Options









ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 435KG



HEAVY DUTY FEATURES



DONALDSON AIR FILTER



HANDBRAKE



ENGINE BRAKING SYSTEM & ACTIVE DESCENT CONTROL (ADC)



27" TYRES

ENGINE & DRIVETRAIN

Displacement / Engine Type	898cc / Kubota 3-Cylinder Diesel
Drive System Type	On-Demand True AWD/2WD/Versatrac Turf Mode

SUSPENSION

 \vdash Н

Н

. n/a

 \square \supset \vdash ∍ O Н α Ü

4

Front Suspension	Dual A-Arm with Stabilizer Bar 27.9 cm Travel
Rear Suspension	Dual A-Arm IRS with Stabilizer Bar 27.9 cm Travel
Front Tyres	27 x 9; R12
Rear Tyres	27 x 11; R12
Wheels	12" Steel

DIMENSIONS

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel Capacity	43.5 L
Ground Clearance	33 cm
Vehicle Size (L x W x H)	305 x 158 x 196 cm
Payload Capacity	720 kg
Box Capacity	435 kg
Wheelbase	206 cm
Estimated Dry Weight	766 kg

ADDED FEATURES

Instrumentation	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Trip Meters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm, Horn, Backup Alarm
Lighting	Headlights : halogen

Variants Homologated Tractor

Cargo System Lock & Ride®





RANGER XP 1000 NORTHSTAR PREMIUM



Colour Options



Azure Crystal Metallic







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 454KG



HEAVY DUTY FEATURES



POLARIS PRO HD 4,500 LB. WINCH



FULL CAB AS STANDARD



ELECTRONIC POWER STEERING



HEATER, A/C & DEFROST

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder DOHC EFI
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

ΗI

Н

 \vdash

. _

AGRICULTURE

SUSPENSIUN	
Front Suspension	Dual A-Arm 27.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 27.9 cm Travel
Front Tyres	27 x 9-14; Pro Armor X-Terrain
Rear Tyres	27 x 11-14; Pro Armor X-Terrain
Wheels	35.6 cm Aluminum

93 3 v 137 9 v 31 75 cm

DIMENSIONS

Bed Box Dimensions

$(L \times W \times H)$	95.5 X 157.6 X 51.75 CIII
Fuel Capacity	43.5 L
Ground Clearance	33 cm
Vehicle Size (L x W x H)	305 x 165 x 198 cm
Payload Capacity	578 kg
Box Capacity	454 kg
Wheelbase	206 cm
Estimated Dry Weight	867 kg

ADDED FEATURES

ADDED LEVINKED	
Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/ Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port
	Polaris HD 4,500 Lb. Synthetic Rope Winch with Autoston and Wireless Remote

Other Standard Features

with Autostop and Wireless Remote, Premium Pro-Shield Cab, Doors with Crank Windows, Fixed Glass Windshield with Wiper, Rear Glass Panel, Dome Light, Rearview Mirror, Heat, AC, Defrost





RANGER XP KINETIC PREMIUM



Colour Options









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 567KG



LITHIUM ION BATTERY 14.9 KWH NOMINAL



3 KW ON-BOARD BATTERY CHARGER



SEAT BELT INTERLOCK



ELECTRONIC POWER STEERING



SEATS 3

ENGINE & DRIVETRAIN

Motor	Internal Permanent Magnet AC Motor
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

ΗI

Н

 \supset

AGRICULTURE

0001 [1101011	
Front Suspension	Dual A-Arm 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	29 x 9-14; PRO ARMOR X-TERRAIN
Rear Tyres	29 x 11-14; PRO ARMOR X-TERRAIN
Wheels	35.6 cm Aluminum

DIMENSIONS

Bed Box Dimensions

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel System/Battery	Lithium Ion, 14.9 kWh Nominal
Ground Clearance	35.6 cm
Vehicle Size (L x W x H)	305 x 158 x 198 cm
Payload Capacity	680.4 kg
Box Capacity	567 kg
Wheelbase	206 cm
Estimated Dry Weight	785 kg

ADDED FEATURES		
Instrumentation	Driver's Side Dual-sweep Analog Dials w/ 4" Multi-Color LCD Rider Information Center: Power Use and Regen %, Battery State of Charge %, Range Remaining, Charging Rate, Battery Temperature, Motor Temperature, Accessory Voltage	
Other Standard Features	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents	
Lighting	Dual LED Headlamps, 1250lm low beam, 2300lm high beam, LED Front Accent Light with Charge Indicator, Dual LED Taillamps	
Estimated Range	Range upto 70km	





RANGER XP KINETIC ULTIMATE



Colour Options









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 567KG



LITHIUM ION BATTERY 29.8 KWH NOMINAL



6 KW ON-BOARD BATTERY CHARGER



SEAT BELT INTERLOCK



ELECTRONIC POWER STEERING



7" OFF-ROAD DISPLAY WITH RIDE COMMAND TECHNOLOGY AND INTEGRATED AUDIO

ENGINE & DRIVETRAIN

Motor	Internal Permanent Magnet AC Motor
Orive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

>

ΗI

Н

E/U

AGRICULTUR

Front Suspension	Dual A-Arm 25.4 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	29 x 9-14; PRO ARMOR X-TERRAIN
Rear Tyres	29 x 11-14; PRO ARMOR X-TERRAIN
Wheels	35.6 cm Aluminum

DIMENSIONS

Bed Box Dimensions

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel System/Battery	Lithium Ion, 29.8 kWh Nominal
Ground Clearance	35.6 cm
Vehicle Size (L x W x H)	305 x 158 x 198 cm
Payload Capacity	680.4 kg
Box Capacity	567 kg
Wheelbase	206 cm
Estimated Dry Weight	900 kg

AUDED FEATURES	
Instrumentation	Center Mounted 7" Glove Touch Display with EV Infotainment (includes Range Remaining, Battery State of Charge, Charging Status, Launch Indicator, System Diagnostics and more), Speed Limiting, Plow Mode, *GPS Navigation, Air Temp., Bluetooth, AM/FM Radio
Other Standard Features	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents
Lighting	Dual LED Headlamps, 1250lm low beam, 2300lm high beam, LED Front Accent Light with Charge Indicator, Dual LED Taillamps
Estimated Range	Range upto 130 km

RANGER CREW SP 570 PREMIUM



TOW MORE, CARRY MORE, DO MORE, SEAT 4.

*MODEL SHOWN WITH OPTIONAL ACCESSORIES



RANGER CREW SP 570 PREMIUM



Colour Options



Ghost Gray







ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



680KG TOWING CAPACITY



DUMP BOX CAPACITY - 227KG



SEATS 4



IRS WITH 25.4CM OF TRAVEL



ELECTRONIC POWER STEERING



SPEED KEY READY



ELECTRONIC FUEL INJECTION

ENGINE & DRIVETRAIN

Displacement / Engine Type	567cc / 4-Stroke Single Cylinder DOHC EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode

SUSPENSION

>

H

IL

E/UT

 \square

ULTI

IC

AGR

Front Suspension	MacPherson Strut 22.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel
Front Tyres	25 x 8-12; Carlisle 489
Rear Tyres	25 x 10-12; Carlisle 489
Wheels	12" Black Aluminum

DIMENSIONS

Bed Box Dimensions (L x W x H)	84.6 x 123.7 x 31.2 cm
Fuel Capacity	35.9 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	365.8 x 142.2 x 188 cm

Payload Capacity	499 kg
Box Capacity	227 kg
Wheelbase	266.7 cm
Estimated Dry Weight	703 kg

ADDED FEATURES

Other Standard Features

	4" LCD Rider Information Center: User
Instrumentation	Selectable Blue/Red Backlighting &
	Brightness, Programmable Service Intervals,
	Speedometer, Tachometer, Odometer,
	Tripmeter, Clock, Hour Meter, Gear
	Indicator, Fuel Gauge, Coolant Temperature,
	Voltmeter, Service Indicator and Codes, Seat
	Belt Reminder, DC Outlet

Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator), 48.4 Gal. Onboard Storage with Enclosed Dash Bins and Integrated Cell-





RANGER CREW 1000 PREMIUM



Colour Options Springfield Blue









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY







SEATS 6



IRS WITH 25.4CM OF TRAVEL



ELECTRONIC POWER STEERING



ELECTRONIC FUEL INJECTION



SPEED KEY READY

ENGINE & DRIVETRAIN

>

 \vdash Н

Н

⊥n/

Ш \square \supset ULTI

O H α Ü 4

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder SOHC EFI
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

Dual A-Arm 25.4 cm Travel
Dual A-Arm, IRS 25.4 cm Travel
26 x 9-12; PXT 2.0
26 x 11-12; PXT 2.0
Aluminum Black Xcelerator 2.0

DIMENSIONS

Bed Box Dimensions (LxWxH) 93.3 x 137.8 x 31.75 cm Fuel Capacity 43 L Ground Clearance 31.8 cm Vehicle Size (LxWxH) 386 x 158 x 193 cm Payload Capacity 794 kg Box Capacity 454 kg Wheelbase 287 cm Estimated Dry Weight 814 kg ADDED FEATURES		
Ground Clearance 31.8 cm Vehicle Size (L x W x H) 386 x 158 x 193 cm Payload Capacity 794 kg Box Capacity 454 kg Wheelbase 287 cm Estimated Dry Weight 814 kg		93.3 x 137.8 x 31.75 cm
Vehicle Size (L x W x H) 794 kg Box Capacity 454 kg Wheelbase 287 cm Estimated Dry Weight	Fuel Capacity	43 L
Payload Capacity 794 kg Box Capacity 454 kg Wheelbase 287 cm Estimated Dry Weight 814 kg	Ground Clearance	31.8 cm
Box Capacity 454 kg Wheelbase 287 cm Estimated Dry Weight 814 kg	Vehicle Size (L x W x H)	386 x 158 x 193 cm
Wheelbase 287 cm Estimated Dry Weight 814 kg	Payload Capacity	794 kg
Estimated Dry Weight 814 kg	Box Capacity	454 kg
Zotimatod Dry Hotght	Wheelbase	287 cm
ADDED FEATURES	Estimated Dry Weight	814 kg
	ADDED FEATURES	

Instrumentation	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet
Other Standard Features	Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port.
Lighting	Dual LED Headlamps, 600lm Low Beam, 1000lm High Beam, Dual LED Taillamps

RANGER CREW XP 1000 PREMIUM





RANGER CREW XP 1000 PREMIUM



Colour Options



Bronson Rock Smoke







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX Capacity - 454kg



SEATS 6



IRS WITH 27.9 CM OF TRAVEL



ELECTRONIC POWER STEERING



ELECTRONIC FUEL INJECTION



SEAT BELT INTERLOCK

ENGINE & DRIVETRAIN

Displacement / Engine Type 999cc / 4-Stroke Twin Cylinder DOHC EFI

Drive System Type High Performance On-Demand True

AWD/2WD/VersaTrac Turf Mode

SUSPENSION

ΗI

Н

 \vdash

E/U

 α

⊐⊢

 \supset

IC

60

4

Front Suspension

Dual A-Arm 27.9 cm Travel

Rear Suspension

Dual A-Arm, IRS 27.9 cm Travel

Front Tyres

27 x 9-14; Pro Armor X-Terrain

Rear Tyres

27 x 11-14; Pro Armor X-Terrain

Wheels

35.6 cm Aluminum

DIMENSIONS

Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel Capacity	43.5 L
Ground Clearance	33 cm
Vehicle Size (L x W x H)	386 x 158 x 196 cm
Payload Capacity	767 kg

Box Capacity 454 kg

Wheelbase	287 cm
Estimated Dry Weight	859 kg

ADDED FEATURES

	Dual-sweep Analog Dials w/ 4" LCD Rider Information
	Center: User Selectable Blue/Red Backlighting
	& Brightness, Programmable Service Intervals,
Instrumentation	Speedometer, Tachometer, Odometer, Tripmeter,
	Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant
	Temperature, Voltmeter, Service Indicator and Codes,
	Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port
	Premium Cut & Sew Seats with Contoured

Seatbacks and Embroidered Polaris Branding,
Other Standard Features Premium Steering Wheel and Interior Accents,
Polaris Pulse Electrical System (6 position), Standard

In-Dash SAE Charge Port, NFC Front Badge

Lighting Dual LED Headlamps 1250Im Low Beam 2300Im High Beam Dual LED Taillamps





RANGER CREW XP 1000 NORTHSTAR PREMIUM



Colour Options



Azure Crystal Metallic







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



VERSATRAC TURF MODE



1,134KG TOWING CAPACITY



DUMP BOX CAPACITY - 454KG



SEATS 6



FULL CAB AS STANDARD



POLARIS PRO HD 4,500 LB. WINCH



HEATER, A/C & DEFROST



ELECTRONIC FUEL INJECTION

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder DOHC EFI
Drive System Type	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode

CHEDENCION

>

 \vdash Н

Н

 \vdash

. _

Ш \square \supset \vdash ∍ O Н α Ö 4

SUSPENSIUN	
Front Suspension	Dual A-Arm 27.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 27.9 cm Travel
Front Tyres	27 x 9-14; Pro Armor X-Terrain
Rear Tyres	27 x 11-14; Pro Armor X-Terrain
Wheels	35.6 cm Aluminum

93.3 x 137.8 x 31.75 cm

DIMENSIONS

Bed Box Dimensions

(L x W x H)	93.3 x 137.8 x 31.75 cm
Fuel Capacity	43.5 L
Ground Clearance	33 cm
Vehicle Size (L x W x H)	386 x 165 x 198 cm
Payload Capacity	558 kg
Box Capacity	454 kg
Wheelbase	287 cm
Estimated Dry Weight	1,063 kg

Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port
Other Standard Features	Polaris HD 4,500 Lb. Synthetic Rope Winch with Autostop and Wireless Remote, Premium Pro- Shield Cab, Doors with Crank Windows, Fixed Glass Windshield with Wiper, Rear Glass Panel, Dome Light, Rearview Mirror, Heat, AC, Defrost
Lighting	Dual LED Headlamps, 1250lm Low Beam, 2300lm High Beam, Dual LED Taillamps



POLARIS AGRICULTURE/UTILITY DARE TO COMPARE



RANGER 1000 EPS



RANGER XP 1000 HD EPS ADC



RANGER DIESEL HD EPS ADC

COMPARE THE FACTS	POLARIS RANGER 1000 EPS	HONDA PIONEER 700	CAN-AM DEFENDER HD7 DPS	YAMAHA VIKING	JOHN DEERE XUV835M
HORSEPOWER (HP)	61 🗸	*	52	*	54
TOWING CAPACITY (KG)	1,134	680	1,134	680	900
REAR TRAY CAPACITY (KG)	454	454	454 🗸	272	454 🗸
TURF MODE (UNLOCKING REAR DIFF)	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸
SUSPENSION TRAVEL FRONT/REAR (MM)	254 / 254 🗸	200 / 230	254 / 254 🗸	205 / 205	201 / 231
GROUND CLEARANCE (MM)	305 🗸	270mm	280	300	284
ELECTRONIC POWER STEERING	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸

COMPARE THE FACTS	POLARI RANGER XP HD EPS A	1000	HONDA PIONEER 1000-3	CAN-AM DEFENDER HD10		YAMAHA VIKING	JOHN DEERE XUV835M
HORSEPOWER (HP)	82	/	*	82	/	*	54
TOWING CAPACITY (KG)	1,134	/	907	1,134	/	680	900
REAR TRAY CAPACITY (KG)	454	1	454 🗸	454	1	272	454
SUSPENSION TRAVEL FRONT/REAR (MM)	279 / 279	1	268 / 254	279 / 279	/	205 / 205	201 / 231
GROUND CLEARANCE (MM)	330	/	326	330	/	300	284
FUEL CAPACITY (LITRES)	43.5	/	30	40		36.7	42.8
ELECTRONIC POWER STEERING	Yes	1	Yes 🗸	Yes	/	Yes 🗸	Yes 🗸

COMPARE THE FACTS	POLARIS RANGE DIESEL HD EPS ADC		KUBOTA RTV-X1120DW	JOHN DEERE XUV865M
TOP SPEED (KM/H)	65 🗸	*	46.6	51
HORSEPOWER (HP)	24.8	24	24.8	22.8
TOWING CAPACITY (KG)	1,134	907	590	907
TURF MODE (UNLOCKING REAR DIFF)	Yes 🗸	Yes 🗸	Yes 🗸	Yes
SUSPENSION TRAVEL FRONT/REAR (MM)	279 / 279 🗸	222 / 220	205 / 205	201 / 231
GROUND CLEARANCE (MM)	330 🗸	265	263	284
FUEL CAPACITY (LITRES)	43.5	30	30	42.8
VEHICLE DRY WEIGHT (KG)	766	805	935	884
ELECTRONIC POWER STEERING	Yes 🗸	Yes 🗸	Yes 🗸	Yes
ENGINE BRAKING	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸
ALTERNATOR OUTPUT (AMPS)	140 🗸	55	*	* /

^{*}Honda Pioneer is a trademark of Honda Motor Company Ltd. Yamaha Viking is a trademark of Yamaha Motor Company. Kubota RTV is a trademark of Kubota Corporation.


John Deere XUV is a trademark of Deer & Company. Can-Am Defender is a trademark of Bombardier Recreational Products Inc. Kawasaki Mule is a trademark of Kawasaki Heavy Industries Inc. All comparative data sourced from manufacturer websites and brochure downloads from those sites 3.12.20. *Information not available.



POLARIS AGRICULTURE/UTILITY DARE TO COMPARE



RANGER CREW SP 570 EPS

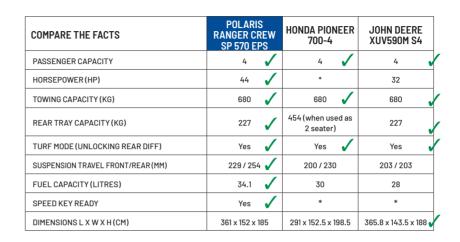



RANGER CREW 1000 EPS

COMPARE THE FACTS	POLARIS RANGER CREW 1000 EPS	HONDA PIONEER 1000-5	KAWASAKI MULE PRO-FXT	JOHN DEERE XUV825M S4	CAN-AM DEFENDER MAX XT
PASSENGER CAPACITY	6	5	6	4	6
HORSEPOWER (HP)	82 🗸	*	47.3	52	82
TOWING CAPACITY (KG)	1,134	907	907	680	1,134
REAR TRAY CAPACITY (KG)	454	454 (when used as 3 seater)	453 kg (3 person) 158 kg (6 person)	454 🗸	454
TURF MODE (UNLOCKING REAR DIFF)	Yes 🗸	Yes 🗸	Yes 🗸	Yes 🗸	Yes
SUSPENSION TRAVEL FRONT/REAR (MM)	279 / 279 🗸	268 / 254	222 / 220	203 / 229	279 / 279
FUEL CAPACITY (LITRES)	43.5	30	30	27.6	40
DIMENSIONS L X W X H (CM)	386 x 158 x 196	296.1 x 159.9 x 194	338.5 x 162.5 x 202	394x 157.1 x 189	402x 162.5 x 202

^{*}Honda Pioneer is a trademark of Honda Motor Company Ltd. John Deere XUV is a trademark of Deer & Company. Can-Am Defender is a trademark of Bombardier Recreational Products Inc. Kawasaki Mule is a trademark of Kawasaki Heavy Industries Inc. All comparative data sourced from manufacturer websites and brochure downloads from those sites 8.12.20. *Information not available.





CHOOSE YOUR

COMMERCIAL

MODELS



PRO XD 2000D AWD EPS



PRO XD 4X4 EPS CREW





PRO XD FULL SIZE DIESEL EPS



Colour Options



Avalanche Gray







ON-DEMAND 4X4



AWD ULTRA TURF



1,134KG TOWING CAPACITY



G





SEATS 2



DONALDSON AIR FILTER



KUBOTA DIESEL ENGINE



SPEED LIMITED TO 40KMH. OPTIONAL TO 25KMH



DIESEL

ENGINE & DRIVETRAIN

Displacement / Engine Type	898 cc / 3-Cylinder Kubota® Diesel

Drive System Type On-Demand 4x4

SUSPENSION

>

ΗI

 \mathbf{H}

 \vdash

CIAL/

 \square

<u>Ш</u> ≥

Σ

C O

Front Suspension	22.9 cm
Rear Suspension	22.9 cm
Front Tyres	26 v 10-12 Duro® DI-2042 Power Grin (M/T

Front Tyres	26 x 10-12 Duro® DI-2042 Power Grip (M/T)

26 x 10-12 Duro® DI-2042 Power Grip (M/T)

Wheels	12 x 6 HD Steel - Gloss Black

DIMENSIONS

Rear Tyres

Bed Box Dimensions	110 5 177 00
(L v W v L)	110.5 x 137 x 29 cm

Fuel Capacity	43.5 L
i dei Gapacity	40.0 L

Payload Capacity	862 kg
i dylodd odpdolly	,

Box Capacity	567 kg
--------------	--------

Wheelbase	215.9 cm
Wileelbase	210.0 0111

Estimated Dry Weight	738 kg

	All Digital Gauge, Speedomoter, Odometer,
	Tachometer, 2 Tripmeters, Hour Meter, Gear
	Indicator, Fuel Gauge, Engine Temperature,
Instrumentation	Hi-Temp Light, Clock, Clutch Belt Slip
	Warning, Glow Plug Indicator, Low Oil
	Pressure Indicator, Seat Belt Indicator,
	Parking Brake Engaged Alarm

Other Standard Features	Kevlar®-Backed Vinyl (Grey)

Lighting	55W low/ 60W high, LED Tail
I lantina	55W low/ bllW nign. I FILLIAII

PRO XD FULL SIZE DIESEL CREW

- 2 FIXED GLASS SCREEN #2889030

 3 FLASHING ORANGE WORK BEACON
 #AUST393
 - 4 POLY DOORS CRANK WINDOW #2884275
 - 5 POLY REAR DOORS CRANK WINDOW #2884276

POLY SPORT CREW ROOF #2883274

6 SLIDING GLASS REAR PANEL #2879015

DURABILITY, SERVICEABILITY AND SAFETY FEATURES.

*MODEL SHOWN WITH OPTIONAL ACCESSORIES



PRO XD FULL SIZE DIESEL EPS



Colour Options



Avalanche Gray







ON-DEMAND 4X4



AWD **ULTRA TURF**



1,134KG TOWING CAPACITY







SEATS 4



DONALDSON AIR FILTER



KUBOTA DIESEL ENGINE



SPEED LIMITED TO **40KMH. OPTIONAL TO** 25KMH



DIESEL

ENGINE & DRIVETRAIN

Displacement / Engine Type	898 cc / 3-Cylinder Kubota® Diesel

Drive System Type On-Demand 4x4

SUSPENSION

>

 \vdash Н

Н

 \vdash **L/**U

4 CI

 \square Ш Σ Σ 0 O

Front Suspension	22.9 cm
Rear Suspension	22.9 cm
Front Tyroc	26 v 10-12 Duro® DI-2042 Power Grip (M/T

Front Tyres	26 x 10-12 Duro® DI-2042 Power Grip (M/T)

Rear Tyres	26 x 10-12 Duro [®] DI-2042 Power Grip (M/T)

140	12 x 6 HD Steel - Gloss Black
Whaale	IZ X 0 HD Steel - Gloss Black

DIMENSIONS

Bed Box Dimensions	110.5 x 137 x 29 cm
$(L \times W \times H)$	110.5 X 137 X 29 C111

Fuel Capacity	43.5 L

Ground Clearance 27.9 cm

Vehicle Size (L x W x H) 399 x 159 x 191 cm

941 kg Payload Capacity

567 kg **Box Capacity**

297.2 cm Wheelbase

856 kg Estimated Dry Weight

ADDED FEATURES

Instrumentation

All Digital Gauge, Speedomoter, Odometer, Tachometer, 2 Tripmeters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Clutch Belt Slip Warning, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm

Other Standard Features Kevlar®-Backed Vinyl (Grey)

55W low/ 60W high, LED Tail Lighting







CHOOSE YOUR
GENERAL
MODELS







GENERAL XP 1000 SPORT



GENERAL XP 4 1000 SPORT





GENERAL 1000 SPORT



Colour Options



White Lightning







ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



ZF SACHS TWIN TUBE SHOCKS



VERSATRAC TURF MODE



680KG TOWING CAPACITY



POLARIS HD 4500 LB. WINCH



ELECTRONIC FUEL INJECTION



ELECTRONIC POWER STEERING



DUMP BOX CAPACITY - 272KG



SEATS 2

ENGINE & DRIVETRAIN

Α×

Д

AND

WORK

Displacement / Engine Type	999 cc / ProStar 1000; 4-Stroke DOHC Twin Cylinder EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode
SUSPENSION	
Front Suspension	Dual A-Arm with Stabilizer Bar 31.1 cm Travel
Poor Sucropoion	Dual Arm IRS with Stabilizer Bar 33.5 cm

Travel

Front Tyres 27x9.00R12 NHS; CST Clincher

Rear Tyres 27x11.00R12 NHS; CST Clincher

Wheels 12" Aluminum

DIMENSIONS

Rear Suspension

DIMENOIONO	
Bed Box Dimensions (L x W x H)	69.8 x 109 x 29.5 cm
Fuel Capacity	35.9 L
Ground Clearance	30.5 cm
Vehicle Size (L x W x H)	295.6 x 158.7 x 187.4 cm
Payload Capacity	499 kg
Wheelbase	206 cm

645 kg

Estimated Dry Weight ADDED FEATURES

Lighting

Instrumentation	Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator
Seat Type	Bolstered Bucket Seats with Driver Seat Slider and Height Adjustable Seat Belts

Dual-sweep Analog Dials w/ 4" LCD Rider

55W Low / 60W High, LED Taillights





GENERAL XP 1000 SPORT



Colour Options



Ghost Gray







ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



WALKER EVANS VELOCITY SERIES SHOCKS



VERSATRAC TURF MODE



Α×

П

AND

ORX

≥

680KG TOWING CAPACITY



POLARIS HD 4500 LB WINCH



ELECTRONIC EL FUEL INJECTION POW



ELECTRONIC POWER STEERING



DUMP BOX CAPACITY - 272KG



SEATS 2

EN	GINE & DRIVETRAIN	
Dis	placement / Engine Type	999 cc / ProStar 1000; 4-Stroke DOHC Twin Cylinder EFI
Driv	ve System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode
SU	SPENSION	
Fro	nt Suspension	Long Travel, High Clearance Dual A-Arm with Stabilizer Bar, 35.6 cm Travel
Rea	ar Suspension	Long Travel, High Clearance Dual Arm IRS with Stabilizer Bar, 35.6 cm Travel
Fro	nt Tyres	30 x 10-15; Pro Armor Crawler XGF or ITP Ultra Cross® R Spec
Rea	ar Tyres	30 x 10-15; Pro Armor Crawler XG or ITP Ultra Cross® R Spec
Wh	eels	15" Aluminum
DI	MENSIONS	
	Box Dimensions W x H)	69.8 x 109 x 29.5 cm
Fue	el Capacity	35.9 L
Gro	und Clearance	34.3 cm
Veh	nicle Size (L x W x H)	300.2 x 162.5 x 194.3 cm
Pay	load Capacity	499 kg
Wh	eelbase	211 cm
Est	imated Dry Weight	750 kg

ADDED FEATURES

ADDED FEATURES	
Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator
Seat Type	Bolstered Bucket Seats with Driver Seat Sliders and Height Adjustable Seat Belts
Lighting	LED Headlight w/ Accent & LED Taillights





GENERAL XP 4 1000 SPORT



Colour Options



Ghost Gray







ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



WALKER EVANS VELOCITY SERIES SHOCKS



VERSATRAC TURF MODE



Α×

Д

ORK AND

≥

680KG TOWING CAPACITY



POLARIS HD 4500 LB WINCH



ELECTRONIC FUEL INJECTION



ELECTRONIC POWER STEERING



DUMP BOX CAPACITY - 272KG



SEATS 4

ENGINE & DRIVETRAIN	
Displacement / Engine Type	999 cc / ProStar 1000; 4-Stroke DOHC Twin Cylinder EFI
Drive System Type	On-Demand True AWD/2WD/VersaTrac Turf Mode
SUSPENSION	
Front Suspension	Long Travel, High Clearance Dual A-Arm with Stabilizer Bar, 35.6 cm Travel
Rear Suspension	Long Travel, High Clearance Dual Arm IRS with Stabilizer Bar, 35.6 cm Travel
Front Tyres	30 x 10-15; Pro Armor Crawler XGF or ITP Ultra Cross® R Spec
Rear Tyres	30 x 10-15; Pro Armor Crawler XG or ITP Ultra Cross® R Spec
Wheels	15" Aluminum
DIMENSIONS	
Bed Box Dimensions (L x W x H)	69.8 x 109 x 29.5 cm
Fuel Capacity	35.9 L
Ground Clearance	34.3 cm
Vehicle Size (L x W x H)	381.5 x 162.5 x 195.1 cm
Payload Capacity	580 kg
Wheelbase	292 cm
Estimated Dry Weight	885 kg
ADDED FEATURES	

Dual-sweep Analog Dials w/ 4″ LCD Rider
Information Center: User Selectable
Blue/Red Backlighting & Brightness,
Programmable Service Intervals,
Speedometer, Tachometer, Odometer,
Tripmeter, Clock, Hour Meter, Gear Indicator,
Fuel Gauge, Coolant Temperature, Voltmeter,
Service Indicator and Codes, Seat Belt
Reminder Light, Gear Indicator, DC Outlet
Bolstered Bucket Seats with Driver Seat

Seat Type

Instrumentation

Bolstered Bucket Seats with Driver Seat Sliders and Height Adjustable Seat Belts

P\$LARIS



GENERAL XP 1000 COMPETITIVE ADVANTAGES VS. YAMAHA WOLVERINE RMAX2 1000 XT-R

PERFORMANCE

True On-Demand AWD

 Fast-engaging, automatic, and can be used at all speeds, providing industry best handling, cornering and capability in technical terrain

vs. Yamaha driver-selectable AWD, Speed limited in 4WD Locked

True 34.29cm Ground Clearance

- True 34.3cm + full vehicle ground clearance to easily clear rough trails or obstacles
- vs. Yamaha max clearance only reached in certain riding conditions
- High-clearance a-arms protect suspension & reduce trail damage vs. Yamaha straight, low-hanging arms

Steel Bumper

• Low-profile steel front bumper for more protection vs. Yamaha factory bumper

Vehicle Width

 Wheels are the widest point of the vehicle, ideal for tight terrain and protection from trail damage

COMFORT

Best Ergonomics & Doors

- Spacious door open for easy in-and-out of vehicle
- Premium half-doors for greater rider comfort and protection

vs. Yamaha narrower openings and smaller, lower doors. No exterior handles make it difficult to open

Top Tier Walker Evans® Velocity Shocks

- Internal bypass technology, and 35.5cm of travel offers the feeling of endless travel
- Three ride zones: small bump plushness, medium bump comfort and never bottom-out control vs. Yamaha Fox® 2.00S3 shocks, only single zone

Beefy Tyres

- 8-ply 30" Pro Armor XG Crawler Tyres on 15" wheels offer smoother ride, max traction, and the most strength
- Asymmetrical and directional by design for best ride and handling, agile cornering and grip during acceleration or a crawl vs. Symmetrical Yamaha 30" on 14" wheels without rear sway bar

VERSATILITY

Storage & Dump Box

- 272kg capacity with dumping cargo box
- Multiple tie-down and Lock & Ride holes to secure gear vs. Yamaha limited mounting points

Vehicle Profile

 Lower vehicle height for more options for garage storage or enclosed trailering vs. Yamaha higher rear profile

Polaris Engineered Accessories

• 20% more options for greater customization vs. Yamaha accessory collection

TECH & AUDIO

Ride Command

- Dash-mounted 7" Glove Touch GPS navigation to stay connected to your group and track your rides
- Front and rear camera
- Audio integration
 vs. Yamaha Adventure Pro no audio integration and
 less functionality



STYLE


Striking Lighting

- Modern LED lights
- Interior blue accents

Clean Color & Graphics

• Premium paint colour and colour-matched parts



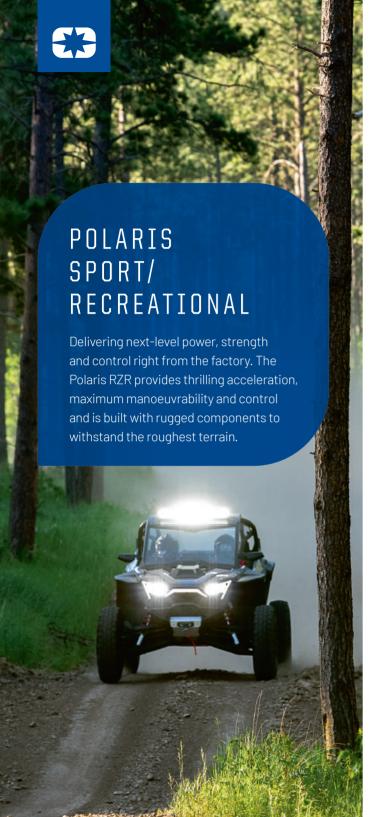

CHOOSE YOUR SPORT/RECREATIONAL MODELS

RZR TRAIL SPORT -



RZR PRO XP SPORT EPS - 64"



RZR TRAIL S 1000 PREMIUM - 60"



RZR PRO XP ULTIMATE - 64"



RZR TURBO R SPORT - 74"



RZR XP 1000 SPORT EPS - 64"



RZR PRO XP 4 SPORT - 64"



RZR TURBO R ULTIMATE - 74"



RZR TURBO R 4 **ULTIMATE - 74"**



RZR XP 1000 SPORT - 64"



RZR PRO XP 4 ULTIMATE - 64"



RZR PRO R **ULTIMATE - 74"**



RZR PRO R 4 **ULTIMATE - 74"**









RZR TRAIL SPORT - 50"



Colour Options









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



ZF TWIN TUBE



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE FRONT **CALIPERS**



680KG TOWING CAPACITY



INDEPENDENT REAR SUSPENSION - 25.4CM OF TRAVEL



ELECTRONIC FUEL INJECTION



ELECTRONIC **POWER STEERING**

ENGINE & DRIVETRAIN

Displacement / Engine Type	875cc / 4-Stroke Twin Cylinder DOHC EFI
Drive System Type	True On-Demand AWD/2WD

SUSPENSION

4 Z 0

Н \vdash 4

Ш α O Ш

RT/R

0 Д ហ

Front Suspension	Dual A-Arm with Stabilizer Bar and 25.4 cm Wheel Travel
Rear Suspension	Dual A-Arm with Stabilizer Bar and 25.4 cm Wheel Travel
Front Tyres	26 X 8 X 12; PXT
Rear Tyres	26 X 9 X 12; PXT

Stamped Steel

DIMENSIONS

Wheels

Bed Box Dimensions (L x W x H)	52.5 x 94 x 20 cm
Fuel Capacity	35.9 L
Ground Clearance	27.9 cm
Vehicle Size (L x W x H)	282 x 127 x 172.5 cm
Payload Capacity	336 kg
Wheelbase	200.7 cm
Estimated Dry Weight	562 kg
ADDED CEATURES	

ADDED FEATURES


Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet + 12V Power Plug.
-----------------	---

Other Standard Features

Adjustable Tilt Steering, Near Field Communication Technology

Lighting

Halogen 55W low/ 60W high & Red LED Tail/ Brake Lights

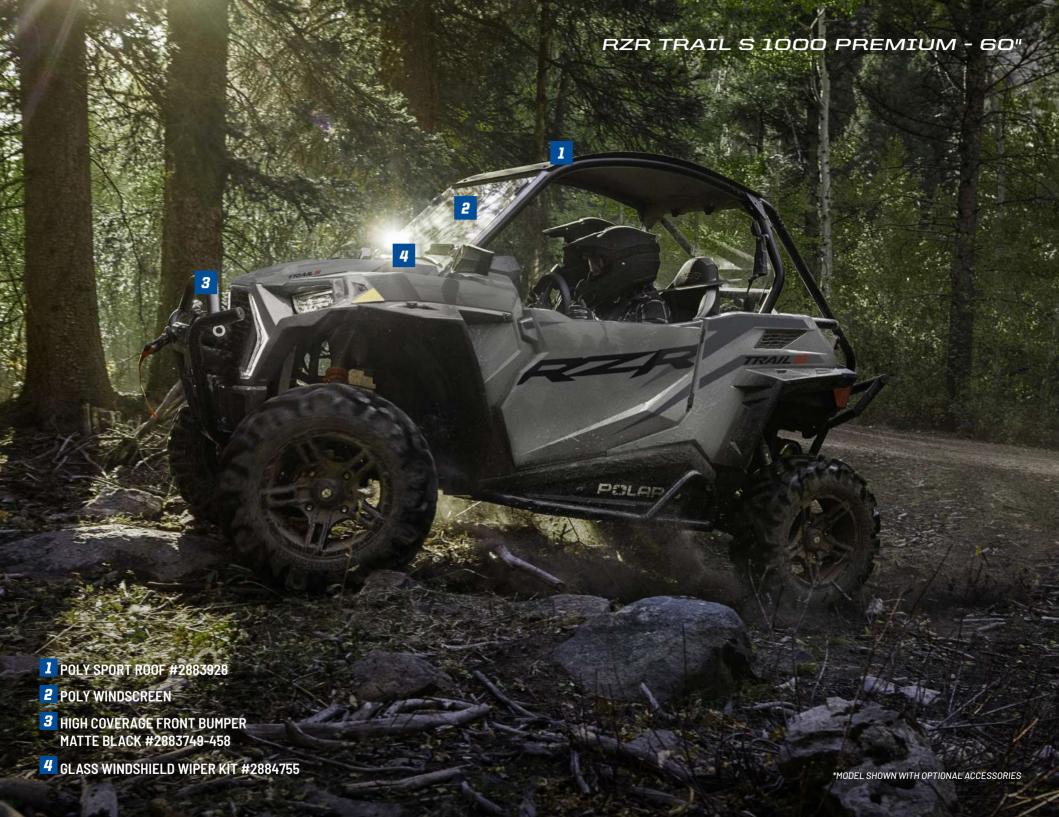



RZR TRAIL S 1000 PREMIUM - 60"



Colour Options



Ghost Gray







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



F0X® 2.0 PODIUM X



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE FRONT AND REAR CALIPERS



680KG TOWING CAPACITY



INDEPENDENT REAR SUSPENSION - 33.5CM OF TRAVEL



ELECTRONIC FUEL INJECTION



ELECTRONIC **POWER STEERING**

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke DOHC Twin Cylinder EFI
Drive System Type	High Performance True On-Demand AWD/2WD

SUSPENSION

Front Suspension

4 Z 0

Н \vdash ⋖

Ш α

C

Ш

RT/R

0 Д ហ

Rear Suspension	Dual A-Arm with Stabilizer Bar and 33.5 cm Wheel Travel
Front Tyres	27 x 9-12; Trailmaster A/T
Rear Tyres	27 x 11-12; Trailmaster A/T

Cast Aluminum

Wheel Travel

Dual A-Arm with Stabilizer Bar and 31.1 cm

DIMENSIONS

Wheels

Bed Box Dimensions (L x W x H)	52.5 x 94 x 20 cm
Fuel Capacity	35.9 L
Ground Clearance	31.8 cm
Vehicle Size (L x W x H)	282 x 152.4 x 176 cm
Payload Capacity	336 kg
Wheelbase	200.7 cm
Estimated Dry Weight	617 kg

ADDED FEATURES

Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet + 12V Power Plug
	Front Blocked Out Cianature White LED

Other Standard Features

Front Blacked Out Signature White LED Low/High with Accent Lights & Red LED Tail

/ Brake Lights





RZR XP 1000 SPORT - 64"



Colour Options Cruiser Black









HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



2" FRONT / 2.5" REAR WALKER EVANS NEEDLE SHOCKS



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE FRONT AND REAR **CALIPERS**



TRAILING ARM WITH STABILIZER BAR 50.8CM USABLE TRAVEL



INDEPENDENT REAR SUSPENSION - 45.7CM OF TRAVEL



29" TYRES



ELECTRONIC POWER STEERING

Н \vdash ⋖ Ш α O Ш \square <u>/</u> \square 0

Д ហ

4 Z 0

Rear Suspension Wable Travel*, 40.6 cm of Wheel Travel*, 40.6 cm of Wheel Travel*, 40.6 cm of Wheel Travel*, 45.7 cm of W	Displacement / Engine Type	999cc / 4-Stroke DOHC Twin Cylinder EF
Front Suspension Dual A-Arm with Stabilizer Bar and 50 Usable Travel*, 40.6 cm of Wheel Travel*, 40.6 cm of Wheel Travel*, 45.7 cm of Wheel Travel*	Drive System Type	
Rear Suspension Wable Travel*, 40.6 cm of Wheel Travel*, 40.6 cm of Wheel Travel*, 40.6 cm of Wheel Travel*, 45.7 cm of W	SUSPENSION	
Visable Travel*, 45.7 cm of Wheel Travel* Front Tyres 29 x 9-14; Radial Tyre Rear Tyres 29 x 11-14; Radial Tyre Wheels Cast Aluminum DIMENSIONS 72.0 x 57.0 x 17.8 cm Bed Box Dimensions (L x W x H) 35.9 L Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	Front Suspension	Dual A-Arm with Stabilizer Bar and 50.8 o Usable Travel*, 40.6 cm of Wheel Travel
Rear Tyres 29 x 11-14; Radial Tyre Wheels Cast Aluminum DIMENSIONS Bed Box Dimensions (L x W x H) 72.0 x 57.0 x 17.8 cm Fuel Capacity 35.9 L Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	Rear Suspension	Trailing Arm with Stabilizer Bar and 50.8 Usable Travel*, 45.7 cm of Wheel Travel
Wheels Cast Aluminum DIMENSIONS Bed Box Dimensions (LxWxH) Fuel Capacity 35.9 L Ground Clearance Vehicle Size (LxWxH) 72.0 x 57.0 x 17.8 cm 35.9 L 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	Front Tyres	29 x 9-14; Radial Tyre
DIMENSIONS Bed Box Dimensions (L x W x H) 72.0 x 57.0 x 17.8 cm Fuel Capacity 35.9 L Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	Rear Tyres	29 x 11-14; Radial Tyre
Bed Box Dimensions (L x W x H) 72.0 x 57.0 x 17.8 cm Fuel Capacity 35.9 L Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	Wheels	Cast Aluminum
(L x W x H) Fuel Capacity 35.9 L Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm	DIMENSIONS	
Ground Clearance 35.6 cm Vehicle Size (L x W x H) 302.2 x 162.6 x 187.3 cm Payload Capacity 336 kg Wheelbase 228.6 cm		72.0 x 57.0 x 17.8 cm
Vehicle Size (L x W x H) $302.2 \times 162.6 \times 187.3 \mathrm{cm}$ Payload Capacity $336 \mathrm{kg}$ Wheelbase $228.6 \mathrm{cm}$	Fuel Capacity	35.9 L
Payload Capacity 336 kg Wheelbase 228.6 cm	Ground Clearance	35.6 cm
Wheelbase 228.6 cm	Vehicle Size (L x W x H)	302.2 x 162.6 x 187.3 cm
	Payload Capacity	336 kg
Estimated Dry Weight 662 kg	Wheelbase	228.6 cm
Localitation Diff. Total Str. 1002 hg	Estimated Dry Weight	662 kg
	ADDED FEATURES	

Dual-sweep Analog Dials w/ 4" LCD Rider	
Information Center: User Selectable	
Blue/Red Backlighting & Brightness,	
Programmable Service Intervals,	
Speedometer, Tachometer, Odometer,	
Tripmeter, Clock, Hour Meter, Gear Indicator	,
Fuel Gauge, Coolant Temperature, Voltmeter	۲,
Service Indicator and Codes, Seat Belt	
Reminder Light, Gear Indicator, DC Outlet	
Adjustable Tilt Steering	

Other Standard Features

Instrumentation



MORE POWER. MORE PERFORMANCE.



RZR PRO XP SPORT EPS - 64"



Colour Options



Ghost Gray







ISOLATED XTREME PERFORMANCE TRUE ON-DEMAND AWD/2WD



2" FRONT / 2.5" REAR WALKER **EVANS NEEDLE** SHOCKS



4-WHEEL HYDRAULIC DISC WITH TRIPLE-BORE FRONT AND DUAL-**BORE REAR CALIPERS**



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY





ELECTRONIC FUEL INJECTION

ELECTRONIC POWER STEERING

ENGINE & DRIVETRAIN

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD
Horsepower	181 HP
SUSPENSION	
	High-Clearance Dual A-Arm with Stabilizer

4 Z 0

Н \vdash 4 Ш α O Ш

RT/R

0 Д ហ

Front Suspension	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 43.2 cm Wheel Travel
Rear Suspension	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Travel*, 50.8 cm Wheel Travel
Front Tyres	30 x 10-14 MAXXIS Carnivore; Wheel Size 14x6
Rear Tyres	30 x 10-14 MAXXIS Carnivore; Wheel Size 14x7

30" Cast Aluminum

DIMENSIONS

Wheels

Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm
Fuel Capacity	45.4 L
Ground Clearance	36.8 cm
Vehicle Size (L x W x H)	320 x 162.6 x 182.1 cm
Payload Capacity	336 kg
Wheelbase	244 cm
Estimated Dry Weight	796 kg
ADDED FEATURES	

Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Service Indicator and Codes
Seat Type	Bolstered Bucket Seats with 4-way adjustability and 3-Pt Height Adjustable

Seat Belts





R7R PRO XP IIITIMATE - 64"



Colour Options



Sunset Red







ISOLATED XTREME PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



FOX 2.5 PODIUM LIVE VALVE SHOCKS



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE XL FRONT AND DUAL-BORE **REAR CALIPERS**



TRAILING ARM STABILIZER BAR 55.9CM **USABLE TRAVEL**



INDEPENDENT REAR SUSPENSION - 50.8CM OF WHEEL TRAVEL



30" TYRES



ELECTRONIC POWER STEERING



ROCKFORD FOSGATE AUDIO



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY

ENGINE & DRIVETRAIN

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
D: 0 . T	Isolated Xtreme Performance True On-

Drive System Type Demand AWD/2WD

Horsepower 181 HP

SUSPENSION

⋖ Z

0

Н \vdash

4 Ш

 α C

Ш α /

 \square 0

Д

ហ

	High-Clearance Dual A-Arm with Stabilizer
Front Suspension	Bar and 50.8 cm Usable Travel*, 43.2 cm

Wheel Travel

Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Rear Suspension

Travel*, 50.8 cm Wheel Travel

30 x 10-14 Maxxis Carnivore II; (8-ply rated); Front Tyres

Wheel Size 14x6

30 x 10-14 Maxxis Carnivore II; (8-ply rated); Rear Tyres

Wheel Size 14x7

Cast Aluminum Wheels

DIMENSIONS

Bed Box Dimensions	66 x 45 x 29.2 cm
$(L \times W \times H)$	

Fuel Capacity 45.4 L

Ground Clearance 36.8 cm

Vehicle Size (L x W x H) 320 x 163 x 182 cm

Payload Capacity 336 kg

Wheelbase 244 cm

Estimated Dry Weight 814 kg

ADDED FEATURES

RIDE COMMAND®, High Output 900w charging system with sealed electrical, Polaris Pulse system, USB Charging, Front Other Standard Features Bumper, In-Dash Charge Port, Cut & Sew Seats, Polaris P.A.S.S., Rockford Fosqate Stage 3 Audio

Signature White LED, Low / High & Red LED Tail / Brake Lights; Front & Rear LED Accent Lighting

Lights

1 ALUMINUM ROOF - BLACK #2881582-458



MORE POWER.
MORE PERFORMANCE.
SEAT 4.



RZR XP 4 1000 PREMIUM EPS - 64"



Colour Options



Onyx Black







HIGH PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



2" FRONT/2.5" REAR WALKER EVANS NEEDLE SHOCKS



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE FRONT AND REAR CALIPERS



ELECTRONIC **FUEL INJECTION**



INDEPENDENT REAR SUSPENSION - 50.8CM OF WHEEL TRAVEL



29" TYRES



ELECTRONIC **POWER STEERING**

ENGINE & DRIVETRAIN

Displacement / Engine Type	999cc / 4-Stroke Twin Cylinder DOHC EFI
Drive System Type	High Performance True On-Demand AWD/2WD

SUSPENSION

Front Suspension

4 Z 0

Н \vdash ⋖

Ш α

C

Ш

 \square <u>/</u> \square 0 Д ហ

Rear Suspension	Trailing Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 45.7 cm of Wheel Travel
Front Tyres	29 x 9-14; Radial Tire
Rear Tyres	29 x 11-14: Radial Tire

29" Cast Aluminum

Dual A-Arm with Stabilizer Bar and 50.8 cm

Usable Travel*, 40.6 cm of Wheel Travel

DIMENSIONS

Wheels

Bed Box Dimensions (L x W x H)	72.0 x 57.0 x 17.8 cm
Fuel Capacity	35.9 L
Ground Clearance	35.6 cm
Vehicle Size (L x W x H)	370.8 x 162.6 x 187.3 cm
Payload Capacity	408 kg
Wheelbase	297.2 cm
Estimated Dry Weight	762 kg

ADDED FEATURES

Other Standard Features

Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet
Lighting	Front Blacked Out Signature White LED Low/High w/ Accent Lights & Red LED Tail / Brake Lights
Other Standard Features	Adjustable Tilt Steering, Front & Rear LED

Accent Lights





RZR PRO XP 4 SPORT - 64"



Colour Options



Ghost Gray







ISOLATED XTREME PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



2" FRONT/2.5" REAR FOX SHOCKS WITH POSITION SENSITIVE SPIRAL TECHNOLOGY



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE XL FRONT AND DUAL-BORE REAR CALIPERS



TRAILING ARM STABILIZER BAR 55.9CM **USABLE TRAVEL**



INDEPENDENT - 50.8CM OF WHEEL TRAVEL



30" TYRES



ELECTRONIC POWER STEERING



ROCKFORD FOSGATE AUDIO



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY

ENGINE & DRIVETRAIN

4 Z 0

Н \vdash ⋖ Ш α O Ш \square <u>/</u> \square 0 Д ហ

Displacement / Engine Type	925cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD
Horsepower	181 HP

Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD
Horsepower	181 HP
SUSPENSION	
Front Suspension	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 43.2 cm Wheel Travel
Rear Suspension	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Travel*, 50.8 cm Wheel Travel
Front Tyres	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x6
Rear Tyres	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x7
Wheels	Cast Aluminum
DIMENSIONS	
Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm
Fuel Capacity	49.2 L

Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm
Fuel Capacity	49.2 L
Ground Clearance	36.8 cm
Vehicle Size (L x W x H)	393.7 x 162.6 x 186.9 cm
Payload Capacity	408 kg
Wheelbase	317.5 cm
Estimated Dry Weight	916 kg
ADDED FEATURES	

ADDED FEATURES	
Other Standard Features	High Output 900w charging system with sealed electrical, Polaris Pulse system, In-Dash Charge Port, Polaris P.A.S.S.
Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights
Seat Type	Bolstered Bucket Seats with 4-way adjustability and 3-Pt Height Adjustable Seat Belts





RZR PRO XP 4 ULTIMATE - 64"



Colour Options



Sunset Red







ISOLATED XTREME PERFORMANCE ON DEMAND TRUE ALL-WHEEL-DRIVE (AWD)



FOX 2.5 PODIUM LIVE VALVE SHOCKS



4-WHEEL HYDRAULIC DISC WITH DUAL-BORE XL FRONT AND DUAL-BORE REAR CALIPERS



TRAILING ARM STABILIZER BAR 55.9CM USABLE TRAVEL



INDEPENDENT REAR SUSPENSION - 50.8CM OF WHEEL TRAVEL



30" TYRES



ELECTRONIC POWER STEERING



ROCKFORD FOSGATE AUDIO



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY

ENGINE & DRIVETRAIN

ONA

EATI

CB

T/RE

0

Д

ហ

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD

Horsepower

SUSPENSION

	High-Clearance Dual A-Arm with Stabilizer
Front Suspension	Bar and 50.8 cm Usable Travel*, 43.2 cm

181 HP

Wheel Travel

Trailing Arm & Standard-Clearance Radius
Rear Suspension Rods with Stabilizer Bar and 55.9 cm Usable

Travel*, 50.8 cm Wheel Travel

Front Tyres 30 x 10-14 Maxxis Carnivore II; (8-ply rated);

Wheel Size 14x6

Rear Tyres 30 x 10-14 Maxxis Carnivore II; (8-ply rated);

Wheel Size 14x7

Wheels Cast Aluminum

DIMENSIONS

Bed Box Dimensions	66 x 45 x 29.2 cm
$(L \times W \times H)$	

Fuel Capacity 49.2 L

Ground Clearance 36.8 cm

Vehicle Size (L x W x H) 393.7 x 162.6 x 186.9 cm

Payload Capacity 408 kg

Wheelbase 317.5 cm

Estimated Dry Weight 937 kg

ADDED FEATURES

RIDE COMMAND® 7" Glove-Touch Display:
DYNAMIX 2.0 Visualizer, Built-In GPS,
Topographic Mapping, Bluetooth & USB
Smartphone Connectivity, AM/FM & Weather
Radio, In-Vehicle Communications Capable
With Optional Sena Headsets

Signature White LED, Low / High & Red LED
Lighting Tail / Brake Lights; Front & Rear LED Accent

Tail / Brake Lights; Front & Rear LED Accent Lights; Interior Accent Lighting







CHOOSE

YOUR SUPERPOWER





TERRAIN TESTED. DRIVER APPROVED.

Powering RZR Turbo R over dunes, trails and rocks is a factory-installed turbo engine proven to perform and engineered to last. Prepare to be thrilled.

925CC TURBO ENGINE

THE RIGHT POWER. RIGHT WHEN YOU NEED IT.

_

Designed for instant corner-to-corner acceleration so you'll always have the power you need to stay out in front.

181 HORSEPOWER

PROSTAR 925CC TURBO ENGINE

2-CYLINDER

LOWER LOW GEAR

MORE TORQUE FOR TOUGH TERRAIN

-

Low and slow is the way to go when you're tackling the wildest, most technical terrain.

RZR Turbo R offers plenty of low gear to capably crawl around, through or over demanding terrain.











THE MOST POWERFUL

SIDE-BY-SIDE

ENGINE EVER

At the heart of the all-new RZR Pro R lies the industry's first naturally aspirated 2.0 L, 4-cylinder engine — boasting more cylinders and more horsepower than any engine ever dropped in a factory side-by-side. With the incredible power to climb, crawl or race your way to more amazing moments on the trail or in the sand, get ready for a ride like never before.

STAYS COOLER IN HOT ENVIRONMENTS

SPEND MORE TIME IN THE SAND, DIRT AND ROCKS.

With a large front fascia and massive radiator, the RZR Pro R is designed to keep your engine running at optimal temperatures. So you can ride on and on.

225 HORSEPOWER

PROSTAR FURY 2.0 L ENGINE

4-CYLINDER



OPTIMIZED POWER FOR EVERY CONDITION

No matter what challenges the terrain has in store, you'll always have the optimal throttle response for the conditions.

RACE

Offers touch-sensitive response that puts power straight to the ground for the fastest hook-up and straight-line acceleration.

ROCK

A slower, more controlled pedal response provides the best slow-speed throttle accuracy – just what you want when rock climbing or maneuvering over tight, technical terrain.

SPORT

This versatile mode is a great balance of throttle response and control across almost all terrains. It's perfect for your everyday driving situations.







STANDARD ON RZR TURBO R AND RZR PRO R

ONE-PIECE CHASSIS

A STABLE FOUNDATION

You'll find a one-piece chassis in all of our Wide Open machines. Built to last, they keep everything firmly in place and allow the machine's superior suspension components to do their part, so you can keep riding across the roughest terrain.

MASSIVE SUSPENSION COMPONENTS

ENGINEERED TO GO BEYOND

Hit the whoops and the rocks with confidence, knowing that your RZR Turbo R or RZR Pro R is engineered with the industry's most robust suspension system featuring huge boxed steel front a-arms, double-shear joints, M14 bolts and more.

UNITIZED HUBS

BRINGING ONROAD TECHNOLOGY OFF-ROAD

Unitized hubs protect your bearings from dust, sand and dirt. Your RZR will operate at its prime longer, and you'll have the freedom to ride even farther off-road.



ONE-PIECE FULLY WELDED ROLL CAGE

SURROUND YOURSELF WITH STRENGTH

RZR Pro R features an all-new one-piece, fully welded roll cage that delivers next-level strength. In addition to giving you greater confidence, the cage adds additional rigidity to the chassis, helping to efficiently deliver more power to the ground and you to the front of the pack.

THE INCREDIBLE STRENGTH OF THE RZR PRO R




DUAL PATH CLUTCH COOLING

LESS MAINTENANCE AND MORE RIDE TIME

The CVT on the RZR Pro R is redesigned to include bigger clutches, an increased center distance, a larger belt and enhanced air flow to minimize heat for longer belt life.

This means improved performance and more epic time out riding.

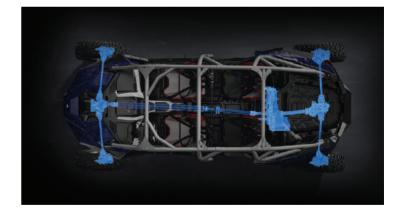

STRONGER DRIVELINE

MORE STRENGTH TO DELIVER BIG POWER

Push the limits knowing that the driveshafts, prop shafts, half shafts and knuckles in your RZR Pro R are stronger than ever before and that a new torque limiter is there to help protect your front drive from sudden surges during power-on landings.





OUR SMARTEST SUSPENSION YET

DYNAMIX DV is the next generation of off-road suspension control. Like previous DYNAMIX systems, it monitors input from the driver and machine 200 times per second and automatically adjusts each shock to reduce corner lean, soak up bumps and handle almost anything in your way. And now, with FOX® Live Valve X2 shocks, it's the first in the industry to provide electronic independent compression and rebound control, providing you with a ride that is as smooth as possible throughout the system's massive usable travel.

*DYNAMIX DV AVAILABLE ONLY ON RZR TURBO R ULTIMATE AND RZR PRO R ULTIMATE

THE INDUSTRY'S ONLY INDEPENDENTLY CONTROLLED
COMPRESSION AND ELECTRIC REBOUND SUSPENSION SYSTEM



COMPRESSION AND REBOUND

SEMI-ACTIVE DAMPING CONTROL SYSTEM

_

DYNAMIX DV utilizes both a compression valve and a rebound valve to independently control damping across the suspension system's full range of motion — an industry first. This revolutionary system controls everything from shock reaction to vehicle height for the ideal ride in any situation.



*****BUTTON

AN ANSWER TO THE UNEXPECTED

Also known as the "Oh (Bleep) Button," it's the ultimate answer for ugly surprises. It lets you instantly take all four shocks to Full Firm Compression Damping and keeps them there until you release the button. You can control your suspension without ever having to take your hands off the wheel.

SUSPENSION MODES REVOLUTIONARY RIDE CONTROL



M O D F 1:

COMFORT

SOAK UP BUMPS

Enjoy maximum comfort with plush suspension settings for all-day rides.

COMPRESSION/REBOUND DAMPING

Low compression damping and low rebound damping for maximum absorption. Perfect for a long day of riding.



M O D E 2:

TRACK

OPTIMAL CORNERING PERFORMANCE

Perfect for twisty trails or short-course racing tracks.

COMPRESSION/REBOUND DAMPING

Medium compression damping and high rebound damping maximize handling performance to corner like you're running on rails.



M O D F 3:

ROCK

CRAWL OVER ROCKS AND BOULDERS

High ride height ideal for rock crawling or off-camber driving situations.

COMPRESSION/REBOUND DAMPING

When traversing rocks and slopes, the vehicle measures the angle and adjusts compression and rebound damping to lean the vehicle into the slope and maximize stability.



MODE 4:

BAJA

FLOAT THROUGH THE WHOOPS

This aggressive tuning provides trophytruck feel in rough desert.

COMPRESSION/REBOUND DAMPING

High compression damping and low rebound damping allows the shocks to extend for maximum travel and ground contract. In corners, it lowers the front end for aggressive cornering.



AUTO-ADJUSTED POWER STEERING

MORE CONTROL IN YOUR HANDS

In addition to monitoring and controlling the suspension system, DYNAMIX DV reacts to vehicle inputs to automatically adjust power steering. By dampening the impact the wildest terrain has on the wheel, your hands and your body, the ststem gives you greater comfort, control and confidence.





RZR TURBO R SPORT - 74"



Colour Options Cruiser black









ISOLATED XTREME PERFORMANCE TRUE ON-DEMAND AWD/2WD



WALKER EVANS **VELOCITY SERIES** SHOCKS



4-WHEEL HYDRAULIC DISC WITH TRIPLE-BORE FRONT AND DUAL-BORE REAR CALIPERS



TUBULAR TRAILING ARM WITH STABILIZER BAR 71.9CM USABLE TRAVEL



RACK MOUNTED HIGH ASSIST ELECTRONIC POWER STEERING WITH **QUICK TURN RACK**



32" TYRES WITH 15" PAINTED CAST **ALUMINIUM WHEELS**



ELECTRONIC FUEL INJECTION

ENGINE & DRIVETRAIN

4 Z 0

Н \vdash 4 Ш α O Ш

RT/R

0 Д ហ

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD
Horsepower	181 HP

Drive System Type	Demand AWD/2WD
Horsepower	181 HP
SUSPENSION	
Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs
Rear Suspension	Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, and Stabilizer Bar and 71.9cm Usable Travel, 56.9cm Wheel Travel, Unitized Hubs
Front Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
Rear Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
Wheels	Painted Cast Aluminium Rim with 5-Lug Pattern
DIMENSIONS	
D 1D D: :	00 (5 00 0

Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm
Fuel Capacity	45.4 L
Ground Clearance	40.6 cm
Vehicle Size (L x W x H)	325 x 188 x 189 cm
Payload Capacity	331 kg
Wheelbase	244 cm
Estimated Dry Weight	881 kg
ADDED FEATURES	

ADDED FEATURES	
Other Standard Features	High Output 900w charging system, Polaris Pulse system, In-Dash Vehicle Charge Port, 2 DC Accy ports, Polaris P.A.S.S., Colored Toe Link, Mud and Rock Guards
Steering Wheel	Race Inspired Steering Wheel with Tilt Adjustment





RZR TURBO R ULTIMATE - 74"



Colour Options R



Orange Madness







ISOLATED XTREME PERFORMANCE TRUE ON-DEMAND AWD/2WD



FOX 3.0 LIVE VALVE X2 SHOCKS



4-WHEEL HYDRAULIC DISC WITH TRIPLE-BORE FRONT AND DUAL-BORE REAR CALIPERS



TUBULAR TRAILING ARM WITH STABILIZER BAR 71.9CM USABLE TRAVEL



ROCKFORD FOSGATE AUDIO



32" TYRES WITH 15" PAINTED CAST **ALUMINIUM WHEELS**



ELECTRONIC FUEL INJECTION



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY



RACK MOUNTED HIGH ASSIST ELECTRONIC POWER STEERING WITH QUICK TURN RACK

ENGINE & DRIVETRAIN

4 Z 0

Н \vdash ⋖ Ш α O Ш \square <u>/</u> \square 0 Д ហ

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD
Horsenower	181 HP

	Demand AWD/ZWD
Horsepower	181 HP
SUSPENSION	
Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs
Rear Suspension	Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, and Stabilizer Bar and 71.9cm Usable Travel 56.9cm Wheel Travel, Unitized Hubs
Front Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
Rear Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
Wheels	Painted Cast Aluminium Rim with 5-Lug Pattern
DIMENSIONS	

Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm
Fuel Capacity	45.4 L
Ground Clearance	40.6 cm
Vehicle Size (L x W x H)	325 x 188 x 189 cm
Payload Capacity	331 kg
Wheelbase	244 cm
Estimated Dry Weight	913 kg
ADDED FEATURES	

Other Standard Features	RIDE COMMAND®, High Output 900W Charging System, Polaris Pulse System, In-Dash Charge Port, 2 front DC Accy ports, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link
Stooring Whool	Race Inspired Steering Wheel with Tilt and

Steering Wheel Telescoping Adjustment





RZR TURBO R 4 ULTIMATE - 74"



Colour Options R



Orange Madness







ISOLATED XTREME PERFORMANCE TRUE ON-DEMAND AWD/2WD



FOX 3.0 LIVE VALVE X2 SHOCKS



4-WHEEL HYDRAULIC DISC WITH TRIPLE-BORE FRONT AND DUAL-BORE **REAR CALIPERS**



TUBULAR TRAILING ARM WITH STABILIZER BAR 71.9CM USABLE TRAVEL



ROCKFORD **FOSGATE AUDIO**



32" TYRES WITH 15" PAINTED CAST **ALUMINIUM WHEELS**



ELECTRONIC FUEL INJECTION



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY



RACK MOUNTED HIGH ASSIST ELECTRONIC POWER STEERING WITH **QUICK TURN RACK**

ENGINE & DRIVETRAIN

Displacement / Engine Type	925 cc / 4-Stroke DOHC Twin Cylinder Turbocharged EFI
Drive System Type	Isolated Xtreme Performance True On- Demand AWD/2WD

Horsepower 181 HP

SUSPENSION

4 Z 0

Н \vdash ⋖

Ш

 α C

Ш α / α 0

Д

ហ

	Light Weight Boxed Dual A-Arm with 3 piece
Front Suspension	Stabilizer Bar and 68.6 cm Usable Travel,
	56.5 cm Wheel Travel, Unitized Hubs

Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, Rear Suspension and Stabilizer Bar and 71.9cm Usable Travel,

56.9 cm Wheel Travel, Unitized Hubs

32 x 10-15 Maxxis Rampage Fury; 8-Ply Front Tyres

Rated; Wheel Size 15x7

32 x 10-15 Maxxis Rampage Fury; 8-Ply Rear Tyres

Rated: Wheel Size 15x7

Painted Cast Aluminium Rim with 5-Lug Wheels

Pattern

DIMENSIONS

Bed Box Dimensions	66 x 45 x 29.2 cm
$(L \times W \times H)$	

49.2 L **Fuel Capacity**

40.6 cm **Ground Clearance**

Vehicle Size (L x W x H) 340 x 188 x 196 cm

Payload Capacity 526 kg

317.5 cm Wheelbase

Estimated Dry Weight 1037 kg

ADDED FEATURES

Other Standard Features	RIDE COMMAND®, High Output 900W Charging System, Polaris Pulse System, In-Dash Charge Port, 1 front DC Accy ports, 1 rear DC Accy port, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link

Race Inspired Steering Wheel with Tilt and Steering Wheel

Telescoping Adjustment

RZR PRO R ULTIMATE - 74"

- 1 HALF WINDSCREEN #2883135
- 2 RIGID® SR-SERIES 32" COMBO LED LIGHT BAR
- FRONT PRE RUNNER BUMPER #2884354-293



SPORT/RECREATIONAL



RZR PRO R ULTIMATE - 74"



Colour Options RC Azure Crystal













225 HP

4 CYLINDER 2.0 LITRE ENGINE

FOX 3.0 LIVE VALVE X2 SHOCKS

4-WHEEL HYDRAULIC DISC WITH TRIPLEBORE FRONT AND DUAL-BORE REAR CALIPERS

BOXED TRAILING ARM WITH STABILIZER BAR 73.7CM USABLE TRAVEL







32" TYRES WITH 15" PAINTED CAST **ALUMINIUM WHEELS**



ELECTRONIC FUEL INJECTION



GPS RIDE COMMAND 7" TOUCH SCREEN DISPLAY

ENCINE & DRIVETRAIN

4 Z 0

Н \vdash 4 Ш α O Ш

RT/R

0 Д ហ

ENGINE & DKINELKAIN			
Displacement / Engine Type	1997cc / 4-Stroke DOHC Inline Four Cyclinder EFI		
Drive System Type	Pro Performance True 2WD/4WD/4WD Lock		
SUSPENSION			
Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs		
Rear Suspension	Boxed Trailing Arm with Toe Link, High- Clearance Radius Rods, and 3 piece Stabilizer Bar and 73.7cm Usable Travel, 62.2cm Wheel Travel, Unitized Hubs		
Front Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply		

Rated: Wheel Size 15x7

32 x 10-15 Maxxis Rampage Fury; 8-Ply Rear Tyres

Rated; Wheel Size 15x7

Painted Cast Aluminum Rim with 5-Lug Wheels

Pattern

DIMENSIONS

Bed Box Dimensions (L x W x H)	75 x 60.5 x 20.6 cm
Fuel Capacity	45.4 L
Ground Clearance	40.6 cm
Vehicle Size (L x W x H)	347 x 188 x 185 cm
Payload Capacity	336 kg
Box Capacity	136 kg
Wheelbase	265.4 cm

ANNEN FEATURES

Estimated Dry Weight

ADDED FEATURES				
Other Standard Features	RIDE COMMAND®, High Output External 1700W Alternator, Polaris Pulse System, In-Dash Charge Port, 1 front DC Accy ports, 1 rear DC Accy port, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link			
Steering Wheel	Race Inspired Steering Wheel with Tilt and Telescoping Adjustment			

992 kg

RZR PRO R 4 ULTIMATE - 74"

- 1 RIGID® SR-SERIES 32" COMBO LED LIGHT BAR
- FRONT PRE RUNNER BUMPER #2884354-293





RZR PRO R 4 ULTIMATE - 74"



Colour Options RC Azure Crystal









4 CYLINDER 2.0 LITRE ENGINE



FOX 3.0 LIVE VALVE X2 SHOCKS



4-WHEEL HYDRAULIC DISC WITH TRIPLEBORE FRONT AND DUAL-BORE REAR CALIPERS



< Z 0

 \mathbf{H} \vdash 4 Ш α O Ш

RT/R

0 Д ហ

BOXED TRAILING ARM WITH STABILIZER BAR 73.7CM USABLE TRAVEL



ROCKFORD FOSGATE AUDIO



32" TYRES WITH 15" PAINTED CAST **ALUMINIUM WHEELS**



ELECTRONIC FUEL INJECTION

ENGINE & DRIVETRAIN		
Displacement / Engine Type	1997cc / 4-Stroke DOHC Inline Four Cylinder EFI	
Drive System Type	Pro Performance True 2WD/4WD/4WD Lock	
SUSPENSION		
Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs	
Rear Suspension	Boxed Trailing Arm with Toe Link, High- Clearance Radius Rods, and 3 piece Stabilizer Bar and 73.7cm Usable Travel, 62.2cm Wheel Travel, Unitized Hubs	
Front Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	
Rear Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	
Wheels	Painted Cast Aluminum Rim with 5-Lug Pattern	
DIMENSIONS		
Bed Box Dimensions (L x W x H)	75 x 60.5 x 20.6 cm	
Fuel Capacity	46.56 L	

Bed Box Dimensions (L x W x H)	75 x 60.5 x 20.6 cm
Fuel Capacity	46.56 L
Ground Clearance	40.6 cm
Vehicle Size (L x W x H)	420 x 188 x 194 cm
Payload Capacity	408 kg
Box Capacity	136 kg
Wheelbase	339.1 cm
Estimated Dry Weight	1125 kg
ADDED FEATURES	

Other Standard Features	RIDE COMMAND®, High Output External 1700W Alternator, Polaris Pulse System, In-Dash Charge Port, 1 front DC Accy ports, 1 rear DC Accy port, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link	
Lighting	Signature White LED, Low/High & Red LED	

Accent Lighting





POLARIS SPORT/RECREATIONAL DARE TO COMPARE



RZR XP 1000 SPORT EPS - 64"

COMPARE THE FACTS	RZR XP 1000 SPORT EPS - 64"	CAN-AM MAVERICK X3 DS TURBO	KAWASAKI TERYX KRX 1000	HONDA TALON SXS1000S2R
HORSEPOWER (HP)	110	120	113	105
GROUND CLEARANCE (MM)	35.6	35.6	36.5	33
ALL-WHEEL-DRIVE	High-Performance True On-Demand AWD/2WD	Selectable 2WD / 4WD with Visco-Lok+ auto-locking front differential	2WD/4WD, Shaft	2WD and i-4WD
WHEELBASE (CM)	228.6	259.1	251	222.6
TYRES	29" Radial Tyre	28" MAXXIS Bighorn	31" MAXXIS Carnivore	28"*
FUEL CAPACITY (L)	35.9	40	40	27.6
USABLE SUSPENSION TRAVEL FRONT/REAR (MM)	50.8 / 50.8	50.8 / 50.8	*	*



POLARIS DYNAMIX VS. CAN-AM SMART SHOX

DYNAMIX FOX LIVEVALVE TECHNOLOGY	CAN-AM SMART SHOX STANDARD FOX SHOCKS WITHOUT LIVEVALVE
3 SUSPENSION MODES + X BUTTON 3 Ride Modes to Best Fit Your Ride: Comfort, Sport & Firm All 3 ride modes have semi-active damping control. PLUS X Button to send the compression damping full firm for 1 second when you see unexpected terrain.	3 SUSPENSION MODES 3 Ride Modes: Comfort, Sport, Sport+ 2 modes with semi-active damping control and one full stiff (Sport+). No X Button.
YEARS AHEAD IN DEVELOPMENT WITH THE FIRST INTELLIGENT COMPRESSION SUSPENSION Increased learning and development from being first to market. 3 years of proven performance and durability.	PISTON VALVE CONTROL Can-Am Smart Shox sense then react using a piston valve.
PREDICTIVE CONTROL Valve reaction time of 0.04 seconds, updating damping targets at 200 times/second with predictive control algorithms. Steering angle sensor helps predict corners quicker. Suspension dampers adjust through the entire turn to promote optimal cornering. Airborne feature pre-predicts landing so that the vehicle lands full stiff.	VALVE REACTION Valve reaction time of 0.014 seconds, updating damping targets at 200 times/second. No steering angle sensor and must react to corner versus predicting the corner. No marketed Airborne feature.
INTEGRATED THROUGHOUT Control and change modes from the steering wheel. X button on steering wheel for instant adjustment and firming when unexpected terrain hits. Visualization from the driver's seat via RIDE COMMAND.	LIMITED INTEGRATION No steering wheel controls. No visualization like RIDE COMMAND

COMPARISON MADE BETWEEN 2021 CAN-AM AND POLARIS MODELS.

*Can-Am Maverick are trademarks of Bombardier Recreational Products Inc. Kawasaki Teryx is a trademark of Kawasaki Heavy Industries Inc. Honda Talon is a trademark of Honda Motor Company Ltd. All comparative data sourced from manufacturer websites, physical assessment and brochure downloads from those sites prior to 9.12.20. *Information not available.







RANGER 150 EFI

RZR 200 EFI

White

	Engine Type	4-Stroke Single Cylinder	4-Stroke Single Cylinder
ENGINE	Displacement	150cc	180cc
ENG	Fuel System	EFI	EFI
	Cooling	Air & Oil	Air & Oil
Z.	Transmission / Final Drive	Automatic PVT F/N/R; Chain	Automatic PVT F/N/R; Chain
DRIVETRAIN	Drive System	2WD	2WD
<u> </u>	Engine Braking System / Active Descent Control	Not Equipped/Not Equipped	Not Equipped/Not Equipped
SUSPENSION	Front Suspension	Single A-Arm with 13 cm Travel	Dual A-Arm with 17.8 cm Travel
SUSPE	Rear Suspension	Dual Shock Swingarm with 15.2 cm Travel	Independent Rear Suspension with 17.8 cm Travel
BRAKES	Front / Rear Brakes	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc
	Parking Brake	Hand-Actuated	Hand-Actuated
HEELS	Front Tyres	22 x 7-10 Wanda	24 x 8 - 12 CST
TYRES AND WHEELS	Rear Tyres	22 x 10-10 Wanda	24 x 10 - 12 CST
TYRES	Wheels	Stamped Steel	Stamped Steel
	Wheelbase	165.1 cm	165.1 cm
	Dry Weight	305 kg	334 kg
ES	Overall Vehicle Size (L x W x H)	215.9 x 121.9 x 147.3 cm	225.6 x 121.9 x 151.2 cm
DIMENSIONS / CAPACITIES	Ground Clearance	20.3 cm	25.4 cm
ONS / C	Seat Height	N.A.	N.A.
MENSIC	Fuel Capacity	9.5 L	9.5 L
百	Front / Rear Rack or Box Capacity	N.A./22.7 kg	22.7 kg/N.A.
	Payload Capacity	170 kg	170 kg
	Hitch Type	N.A.	N.A.
ន្ន	Lighting	Day Time Running Lights, Single Rear Breakelight/Taillight	LED Running Lights, Single Rear Breakelight/Taillight
FEATURES	Electronic Power Steering	Not Equipped	Not Equipped
- L	Instrumentation	Digital Display with Gear Indicator, Odometer, Trip Meter, Voltage, Engine Temperature, Engine Hour Interval, Ground Speed, Engine RPM	Digital Display with Gear Indicator, Odometer, Trip Meter, Voltage, Engine Temperature, Engine Hour Interval, Ground Speed, Engine RPM, Youth Ride Command (Speed Limiting, Geofencing, Helmet Aware)
	0.1		

Colours Avalanche Gray









RANGER SP 530

RANGER 570 HD EPS ADC

RANGER SP 570 PREMIUM

RANGER 1000 EPS

Engine Type	4-Stroke Single Cylinder DOHC	4-Stroke Single Cylinder DOHC	4-Stroke Single Cylinder DOHC	4-Stroke Twin Cylinder SOHC
Displacement	567cc	567cc	567cc	999cc
Displacement Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
Cooling	Liquid	Liquid	Liquid	Liquid
Transmission/ Final Drive	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft
Final Drive Drive System Engine Braking System /	On-Demand True AWD/2WD/VersaTrac Turf Mode	On-Demand True AWD/2WD/VersaTrac Turf Mode	On-Demand True AWD/2WD/VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode
Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	ADC Equipped	Not Equipped/Not Equipped	Not Equipped/Not Equipped
Front Suspension	MacPherson Strut 22.9 cm Travel	MacPherson Strut 22.9 cm Travel	MacPherson Strut 22.9 cm Travel	Dual A-Arm 25.4 cm Travel
Front Suspension Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel
Front/Rear Brakes Parking Brake	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers
	Park in Transmission	Park in Transmission	Park in Transmission	Park in Transmission
Front Tyres Rear Tyres	25 x 8-12; Carlisle 489	25 x 8-12; Carlisle 489	25 x 8-12; Carlisle 489	25 x 10-12; Carlisle 489
Rear Tyres	25 x 10-12; Carlisle 489	25 x 10-12; Carlisle 489	25 x 10-12; Carlisle 489	25 x 11-12; Carlisle 489
Wheels	Stamped Steel	Stamped Steel	12" Black Aluminum	Stamped Steel
Wheelbase	185.4 cm	200.7 cm	185.4 cm	206 cm
Dry Weight	525 kg	486 kg	564 kg	674 kg
Overall Vehicle Size (L x W x H)	274.3 x 142.2 x 188 cm	290 x 152 x 188 cm	274.3 x 142.2 x 188 cm	305 x 158 x 193 cm
Ground Clearance	27.9 cm	26.7 cm	27.9 cm	30.5 cm
Seating Capacity	2	3	2	3
Fuel Capacity	35.9 L	34.1L	35.9 L	43 L
Ground Clearance Seating Capacity Fuel Capacity Bed Box Dimensions (L x W x H) Front/Rear Rack or Box Capacity	84.6 x 123.7 x 31.2 cm	93 x 137 x 29 cm	84.6 x 123.7 x 31.2 cm	93.3 x 137.8 x 31.75 cm
Front/Rear Rack or Box Capacity	N.A / 227 kg	N.A / 363 kg	N.A / 227 kg	N.A / 454 kg
Payload Capacity	453 kg	680 kg	420 kg	680 kg
Hitch Towing Rating	680 kg	680 kg	680 kg	1,134 kg
Hitch Type	Standard 5 cm Receiver	Standard 5 cm Receiver	Standard 5 cm Receiver	Standard 5 cm Receiver
Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride®	Lock & Ride®
Lighting	55W Headlight, LED Taillamps	50W Headlight, LED Taillight	High/Low Beam LED Headlights LED Taillamps	Halogen Headlamps, 55W Low Beam, 60W High Beam, Dual LED Taillamps
Electronic Power Steering	Not Equipped	Standard	Standard	Standard
Adjustable Driver's Seat	Not Equipped	Not Equipped	Not Equipped	Not Equipped
Tilt Steering	Standard	Standard	Standard	Standard
Instrumentation	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals. Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet	Single Analog Dial with 2" LCD Rider Information Center: Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seatbelt Reminder Light, DC Outlet	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet	4*LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Servic Indicator and Codes, Seat Belt Reminder, DC Outlet
Other Standard Features	Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 340 CCA Battery, 660W Charging System (Stator)	N.A	Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator)	Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Por

Colours









RANGER 1000 PREMIUM

Springfield Blue

RANGER XP 1000 HD EPS ADC

RANGER DIESEL HD EPS ADC

Sage Green

RANGER XP 1000 NORTHSTAR PREMIUM

Engine Type	4-Stroke Twin Cylinder SOHC	4-Stroke Twin Cylinder DOHC	Kubota 3-Cylinder Diesel	4-Stroke Twin Cylinder DOHC
Displacement	999cc	999cc	898cc	999cc
Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Mechanical Injection	Electronic Fuel Injection
Cooling	Liquid	Liquid	Liquid	Liquid
Transmission/ Final Drive	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H / L / N / R / P; Shaft	Automatic PVT H/L/N/R/P; Shaft
Drive System	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode	On-Demand True AWD/2WD/Versatrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode
Engine Braking System / Active Descent Control	Not Equipped/ Not Equipped	ADC Equipped	ADC Equipped	Not Equipped / Not Equipped
Front Suspension	Dual A-Arm 25.4 cm Travel	Dual A-Arm 27.9 cm Travel	Dual A-Arm with Stabilizer Bar 27.9 cm Travel	Dual A-Arm 27.9 cm Travel
Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 27.9 cm Travel	Dual A-Arm IRS with Stabilizer Bar 27.9 cm Travel	Dual A-Arm, IRS 27.9 cm Travel
Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers
Parking Brake	Park in Transmission	Park in Transmission	Hand-Actuated	Park in Transmission
Front Tyres	26 x 9-12; PXT 2.0	27 x 9-14; Pro Armor X-Terrain	27 x 9; R12	27 x 9-14; Pro Armor X-Terrain
Rear Tyres	26 x 11-12; PXT 2.0	27 x 11-14; Pro Armor X-Terrain	27 x 11; R12	27 x 11-14; Pro Armor X-Terrain
Wheels	Aluminum Black Xcelerator 2.0	14" Aluminum	12" Steel	35.6 cm Aluminum
Wheelbase	206 cm	206 cm	206 cm	206 cm
Dry Weight	674 kg	737 kg	766 kg	867 kg
Overall Vehicle Size (L x W x H)	305 x 158 x 193 cm	305 x 158 x 196 cm	305 x 158 x 196 cm	305 x 165 x 198 cm
Ground Clearance	31.8 cm	33 cm	33 cm	33 cm
Seating Capacity	3	3	3	3
Fuel Capacity	43 L	43.5 L	43.5 L	43.5 L
Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm
Front/Rear Rack or Box Capacity _	N.A / 454 kg	N.A / 454 kg	N.A / 435 kg	454 kg
Payload Capacity	680 kg	680 kg	720 kg	578 kg
Hitch Towing Rating	1,134 kg	1,134 kg	1,134 kg	1,134 kg
Hitch Type	Standard 5 cm Receiver	Standard 5 cm Receiver	Receiver w/ ECE R55 ball	Standard 5 cm Receiver
Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride®	Lock & Ride®
Lighting	Dual LED Headlamps, 600lm Low Beam, 1000lm High Beam, Dual LED Taillamps	Dual LED Headlamps, 1250 lm Low Beam, 2300 lm High Beam, Dual LED Taillamps	Headlights : halogen	Dual LED Headlamps, 1250lm Low Beam, 2300lm High Beam, Dual LED Taillar
Electronic Power Steering	Standard	Standard	Standard	Standard
Adjustable Driver's Seat	Standard	Standard	N.A	Standard
Tilt Steering	Standard	Standard	N.A	Standard
Instrumentation	4*LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet	Dual-sweep Analog Dials w/ 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals. Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 1 DC Outlet, 1 USB Charge Port	All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Trip Meters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm, Horn, Backup Alarm	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/R Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachomet Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperat Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge
_	Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position),	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris		Polaris HD 4,500 Lb. Synthetic Rope Winch with Autostop and Wireless Remote,

Bronson Rock Smoke

124

Azure Crystal Metallic





RANGER XP KINETIC PREMIUM

RANGER XP KINETIC ULTIMATE

	Engine Type Interior Permanent Magnet AC Motor		Interior Permanent Magnet AC Motor	
뾜	Displacement	N.A	N.A	
ENGINE	Fuel System / Battery	Lithium-lon, 14.9 kWh Nominal	Lithium-lon, 29.8 kWh Nominal	
	Cooling	Active Air and Liquid	Active Air and Liquid	
AIN	Transmission/ Final Drive	Gates Synchronous Belt H/L/N/P (Electronic Forward/Reverse), Shaft	Gates Synchronous Belt H/L/N/P (Electronic Forward/Reverse), Shaft	
DRIVETRAIN	Drive System	High Performance On-Demand True AWD/2WD/ VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/ VersaTrac Turf Mode	
	Engine Braking System / Active Descent Control	Regenerative Braking / Not Equipped	Regenerative Braking / Not Equipped	
SUSPEN- SION	Front Suspension	Dual A-Arm 25.4 cm Travel	Dual A-Arm 25.4 cm Travel	
ns s	Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	
BRAKES	Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Callipers	4-Wheel Hydraulic Disc with Dual-Bore Front Callipers	
#	Parking Brake	Park In-Transmission	Park In-Transmission	
S S	Front Tyres	29 X 9-14; PRO ARMOR X-TERRAIN; 8-Ply Rated	29 X 9-14; PRO ARMOR X-TERRAIN; 8-Ply Rated	
ES A	Rear Tyres	29 x 11-14; PRO ARMOR X-TERRAIN; 8-Ply Rated	29 x 11-14; PRO ARMOR X-TERRAIN; 8-Ply Rated	
Ę×	Wheels	35.6 cm Aluminum	35.6 cm Aluminum	
	Wheelbase	206 cm	206 cm	
	Dry Weight	785 kg *Pre-production estimates and final vehicles weights may vary slightly	900 kg *Pre-production estimates and final vehicles weights may vary slightly	
S	Overall Vehicle Size (L x W x H)	305 x 158 x 198 cm	305 x 158 x 198 cm	
Ĕ	Ground Clearance	35.6 cm	35.5 cm	
APAC	Seating Capacity	3	3	
S/C	Fuel Capacity	N.A	N.A	
DIMENSIONS / CAPACITIES	Bed Box Dimensions (L x W x H)	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm	
DIME	Front/Rear Rack or Box Capacity	N.A / 567 kg	N.A / 567 kg	
	Payload Capacity	680 kg	680 kg	
	Hitch Towing Rating	1,134 kg	1,134 kg	
	Hitch Type	Standard 5 cm Receiver	Standard 5 cm Receiver	
	Cargo System/Cab	Lock & Ride®	Lock & Ride®	
	Lighting	Dual LED Headlamps, 1250Im low beam, 2300Im high beam, LEO Front Accent Light with Charge Indicator, Dual LED Taillamps	Dual LED Headlamps, 1250lm low beam, 2300lm high beam, LED Front Accent Light with Charge Indicator, Dual LED Taillamps	
	Electronic Power Steering	Standard	Standard	
	Seat Type	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding	
SES	Tilt Steering	Standard	Standard	
FEATURES	Instrumentation	Driver's Side Dual-sweep Analog Dials w/ 4" Multi-Color LCD Rider Information Center: Power Use and Regen %, Battery State of Charge %, Range Remaining, Charging Rate, Battery Temperature, Motor Temperature, Accessory Voltage, Speedometer, Odometer, Tripmeter, Gear Indicator, Service Indicator and Codes, Programmable Service Intervals, Seat Belt Reminder, User Selectable Backlighting & Brightness, Clock, Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents, Polaris Pulse Electrical System (6 position), DC Outlets, Dual USB Port, Cargo Box Located 12V SAE Port with In-Dash On/Off Switch	Center Mounted T Glove Touch Display with EV Infotainment (includes Range Remaining, Battery State of Charge, Charging Status, Launch Indicator, System Diagnostics and more). Speed Limiting, Plow Mode, "Group Ride, "GPS Navigation, Air Temp., Bluetooth, AM/FM Radio, Driver's Side Dual-sweep Analog Dials w/ 4" Multi-Color LCD Rider Information Center: Power Use and Regen %, Battery State of Charge %, Range Remaining, Charging Rate, Battery Temperature, Motor Temperature, Accessory Voltage, Speedometer, Odometer, Tripmeter, Gear Indicator, Service Indicator and Codes, Programmable Service Intervals, Seat Belt Reminder, User Selectable Backlighting & Brightness, Clock	
	Other Standard Features	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding. Premium Steering Wheel and Interior Accents	

Colours | Ice White Pearl | Ice White Pearl | Ice White Pearl |









RANGER CREW SP 570 PREMIUM

RANGER CREW 1000 PREMIUM

RANGER CREW XP 1000 PREMIUM

RANGER CREW XP 1000 NORTHSTAR PREMIUM

Engine Type	4-Stroke Single Cylinder DOHC	4-Stroke Twin Cylinder SOHC	4-Stroke Twin Cylinder DOHC	4-Stroke Twin Cylinder DOHC
Displacement	567cc	999сс	999сс	999cc
Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
Cooling	Liquid	Liquid	Liquid	Liquid
Transmission/ Final Drive	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft
Final Drive Drive System Engine Braking System /	On-Demand True AWD/2WD/VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode	High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode
Active Descent Control _	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped
Front Suspension	MacPherson Strut 22.9 cm Travel	Dual A-Arm 25.4 cm Travel	Dual A-Arm 27.9 cm Travel	Dual A-Arm 27.9 cm Travel
Front Suspension Rear Suspension	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 25.4 cm Travel	Dual A-Arm, IRS 27.9 cm Travel	Dual A-Arm, IRS 27.9 cm Travel
Front/Rear Brakes Parking Brake	4-Wheel Hydraulic Disc	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers
Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission	Park in Transmission
Front Tyres	25 x 8-12; Carlisle 489	26 x 9-12; PXT 2.0	27 x 9-14; Pro Armor X-Terrain	27 x 9-14; Pro Armor X-Terrain
Front Tyres Rear Tyres	25 x 10-12; Carlisle 489	26 x 11-12; PXT 2.0	27 x 11-14; Pro Armor X-Terrain	27 x 11-14; Pro Armor X-Terrain
Wheels	30.5 cm Black Aluminum	Aluminum Black Xcelerator 2.0	35.6 cm Aluminum	35.6 cm Aluminum
Wheelbase	266.7 cm	287 cm	287 cm	287 cm
Dry Weight	703 kg	814 kg	859 kg	1,063 kg
Overall Vehicle Size (L x W x H)	365.8 x 142.2 x 188 cm	386 x 158 x 193 cm	386 x 158 x 196 cm	386 x 165 x 199 cm
Ground Clearance	27.9 cm	31.8 cm	33 cm	33 cm
Seating Capacity	4	6	6	6
Fuel Capacity	35.9 L	43 L	43.5 L	43.5
Ground Clearance Seating Capacity Fuel Capacity Bed Box Dimensions (L x W x H) Front/Rear Rack or Box Capacity	84.6 x 123.7 x 31.24 cm	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm	93.3 x 137.8 x 31.75 cm
Front/Rear Rack or Box Capacity	N.A / 227 kg	N.A / 454 kg	454 kg	455 kg
Payload Capacity	499 kg	794 kg	767 kg	558 kg
Hitch Towing Rating	680 kg	1,134 kg	1,134 kg	1,134 kg
Hitch Type	Standard 5 cm Receiver	Standard 5 cm Receiver	Standard 5 cm Receiver	Standard 5 cm Receiver
Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride®	Lock & Ride®
Lighting	High/Low Beam LED Headlights LED Taillamps	Dual LED Headlamps, 600lm Low Beam, 1000lm High Beam, Dual LED Taillamps	Dual LED Headlamps 1250lm Low Beam 2300lm High Beam Dual LED Taillamps	Dual LED Headlamps, 1250lm Low Beam, 2300lm High Beam, Dual LED Taillamps
Electronic Power Steering	Standard	Standard	Standard	Standard
Adjustable Driver's Seat	Not Equipped	Standard	Standard	Standard
Tilt Steering	Standard	Standard	Standard	Standard
Instrumentation	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet	4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedom eter, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port
Other Standard Features	Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator)	Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port.	Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents, Polaris Pulse Electrical System (6 position), Standard In-Dash SAE Charge Port, NFC Front Badge	Polaris HD 4,500 Lb. Synthetic Rope Winch with Autostop and Wireless Remote, Premium Pro-Shield Cab, Doors with Crank Windows, Fixed Glass Windshield with Wiper, Rear Glass Panel





PRO XD FULL SIZE DIESEL

PRO XD FULL SIZE DIESEL CREW

	Engine Type	3-Cylinder Kubota® Diesel	3-Cylinder Kubota® Diesel	
ENGINE	Displacement	898 cc	898 cc	
ENG	Fuel System / Battery	Mechanical Injection	Mechanical Injection	
AIN	Cooling	Liquid	Liquid	
	Transmission/ Final Drive	Automatic PVT H/L/N/R/P; Shaft	Automatic PVT H/L/N/R/P; Shaft	
DRIVETRAIN	Drive System	On-Demand 4x4	On-Demand 4x4	
	Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Not Equipped / Not Equipped	
SUSPENSION	Front Suspension	22.9 cm	22.9 cm	
SUSPE	Rear Suspension	22.9 cm	22.9 cm	
BRAKES	Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front Calipers	
	Parking Brake	Park in Transmission + Separate Mechanical Parking Brake Standard	Park in Transmission + Separate Mechanical Parking Brake Standard	
SB	Front Tyres	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	
RES AND	Rear Tyres	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	26 x 10-12 Duro® DI-2042 Power Grip (M/T)	
<u>F</u> >	Wheels	12 x 6 HD Steel - Gloss Black	12 x 6 HD Steel - Gloss Black	
	Wheelbase	215.9 cm	297.2 cm	
	Dry Weight	723 kg	864 kg	
S.	Overall Vehicle Size (L x W x H)	320 x 159 x 191 cm	399 x 159 x 191 cm	
E	Ground Clearance 27.9 cm		27.9 cm	
APA	Seating Capacity	2	4	
S/C	Fuel Capacity 43.5 L		43.5 L	
DIMENSIONS / CAPACITIES	Bed Box Dimensions (L x W x H)	110.5 x 137 x 29 cm	110.5 x 137 x 29 cm	
DIME	Front/Rear Rack or Box Capacity	567 kg	567 kg	
	Payload Capacity 862 kg		941 kg	
	Hitch Towing Rating	1,134 kg	1,134 kg	
	Hitch Type	Standard 5 cm Receiver	Standard 5 cm Receiver	
	Cargo System/Cab	Lock & Ride	Lock & Ride	
	Lighting	55W low/ 60W high, LED Tail	55W low/ 60W high, LED Tail	
	Electronic Power Steering	Optional	Standard	
RES	Adjustable Driver's Seat	Not Equipped	Not Equipped	
FEATURES	Tilt Steering	Standard	Standard	
	Instrumentation	All Digital Gauge, Speedomoter, Odometer, Tachometer, 2 Tripmeters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Clutch Belt Slip Warning, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm	All Digital Gauge, Speedomoter, Odometer, Tachometer, 2 Tripmeters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Clutch Belt Slip Warning, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm	
	Other Standard Features	Horn, Backup Alarm	Horn, Backup Alarm	
	Colours	Grey	Grey	







GENERAL 1000 SPORT

GENERAL XP 1000 SPORT

GENERAL XP 4 1000 SPORT

	Engine Type	ProStar 1000; 4-Stroke DOHC Twin Cylinder	ProStar 1000; 4-Stroke DOHC Twin Cylinder	ProStar 1000; 4-Stroke DOHC Twin Cylinder
ш.	· · · · -	999 cc	999 cc	999 cc
ENGINE	Displacement			
_	Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
	Cooling Transmission/	Liquid	Liquid	Liquid
DRIVETRAIN	Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
	Drive System	On-Demand True AWD/2WD/VersaTrac Turf Mode	On-Demand True AWD/2WD/VersaTrac Turf Mode	On-Demand True AWD/2WD/VersaTrac Turf Mode
	Engine Braking System / Active Descent Control	EDA: Engine Deceleration Assist / N.A.	EDA: Engine Deceleration Assist/ N.A.	EDA: Engine Deceleration Assist / N.A.
SUSPENSION	Front Suspension	Dual A-Arm with Stabilizer Bar 31.1 cm Travel	Long Travel, High Clearance Dual A-Arm with Stabilizer Bar, 35.6 cm Travel	Long Travel, High Clearance Dual A-Arm with Stabilizer Bar, 35.6 cm Travel
SUSPE	Rear Suspension	Dual Arm IRS with Stabilizer Bar 33.5 cm Travel	Long Travel, High Clearance Dual Arm IRS with Stabilizer Bar, 35.6 Travel	Long Travel, High Clearance Dual Arm IRS with Stabilizer Bar, 35.6 Travel
BRAKES	Front/Rear Brakes	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers
m	Parking Brake –	Park in Transmission	Park in Transmission	Park in Transmission
S	Front Tyres	27x9.00R12 NHS; CST Clincher	30 x 10-15; Pro Armor Crawler XGF or ITP Ultra Cross® R Spec	30 x 10-15; Pro Armor Crawler XGF or ITP Ultra Cross® R Spec
钁	Rear Tyres	27x11.00R12 NHS; CST Clincher	30 x 10-15; Pro Armor Crawler XG or ITP Ultra Cross® R Spec	30 x 10-15; Pro Armor Crawler XG or ITP Ultra Cross® R Spec
-	Wheels	12" Aluminum	15" Aluminum	15" Aluminum
	Wheelbase	206 cm	211 cm	292 cm
	Dry Weight	645 kg	750 kg	885 kg
	Overall Vehicle Size (L x W x H)	295.6 x 158.7 x 187.4 cm	300.2 x 162.5 x 194.3 cm	381.5 x 162.5 x 195.1 cm
Ë	Ground Clearance	30.5 cm	34.3 cm	34.3 cm
PAC	Seating Capacity	2	2	4
/C/	Fuel Capacity	35.9 L	35.9 L	35.9 L
DIMENSIONS / CAPACITIES	Bed Box Dimensions (L x W x H)	69.8 x 109 x 29.5 cm	69.8 x 109 x 29.5 cm	69.8 x 109 x 29.5 cm
	Front/Rear Rack or Box Capacity	N.A. / 272 kg Rear Dumping Box	N.A. / 272 kg Rear Dumping Box	N.A. / 272 kg Rear Dumping Box
	Payload Capacity	499 kg	499 kg	580 kg
	Hitch Towing Rating	680 kg	680 kg	680 kg
	Hitch Type	Standard/5.08 cm Receiver	Standard/5.08 cm Receiver	Standard/5.08 cm Receiver
	Cargo System/Cab -	Lock & Ride®	Lock & Ride®	Lock & Ride®
	Lighting _	55W Low / 60W High, LED Taillights	LED Headlight w/ Accent & LED Taillights	LED Headlight w/ Accent & LED Taillights
	Electronic Power Steering	Standard	High Output EPS	High Output EPS
FEATURES	Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Select- able Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable B Red Backlighting & Brightness, Programmable Service Intervals, Speedometr Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gau Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Remin Light, Gear Indicator, DC Outlet
	Other Standard Features	N.A	POLARIS HD 4500 LB Winch w/ Synthetic Rope, Aluminum Fairlead & Rubber Isolator Sport Low Profile Front Bumper ProFit Sport Roof	POLARIS HD 4500 LB Winch w/ Synthetic Rope, Aluminum Fairlead & Rubber Iso Sport Low Profile Front Bumper ProFit Sport Roof
	Colours	White Lightning	Ghost Gray	Ghost Gray









RZR TRAIL SPORT - 50"

RZR TRAIL S 1000 PREMIUM - 60"

RZR XP 1000 SPORT - 64"

RZR PRO XP SPORT - 64"

Engine Type	4-Stroke DOHC Twin Cylinder	4-Stroke DOHC Twin Cylinder	4-Stroke DOHC Twin Cylinder	4-Stroke DOHC Twin Cylinder Turbocharged
Displacement	875cc	999cc	999cc	925cc
Displacement Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
Cooling	Liquid	Liquid	Liquid	Liquid
Transmission/ Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
Drive System	True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD
Engine Braking System / Active Descent Control	Yes / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped
Front Suspension	Dual A-Arm with Stabilizer Bar and 25.4 cm Wheel Travel	Dual A-Arm with Stabilizer Bar and 31.1 cm Wheel Travel	Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 40.6 cm of Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel
Front Suspension Rear Suspension	Dual A-Arm with Stabilizer Bar and 25.4 cm Wheel Travel	Dual A-Arm with Stabilizer Bar and 33.5 cm Wheel Travel	Trailing Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 45.7 cm of Wheel Travel	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Travel*, 50.8 cm Wheel Travel
Front/Rear Brakes Parking Brake	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipe
Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission	Park in Transmission
Front Tyres Rear Tyres	26 X 8 X 12; PXT	27 x 9-12; Trailmaster A/T	29 x 9-14; Radial Tire	30 x 10-14 MAXXIS Carnivore; Wheel Size 14x6
Rear Tyres	26 X 9 X 12; PXT	27 x 11-12; Trailmaster A/T	29 x 11-14; Radial Tire	30 x 10-14 MAXXIS Carnivore; Wheel Size 14x7
Wheels	Stamped Steel	Cast Aluminum	Cast Aluminum	Cast Aluminum
Wheelbase	200.7 cm	200.7 cm	228.6 cm	244 cm
Dry Weight	561.5 kg	600 kg	662 kg	796Kg
Overall Vehicle Size (L x W x H)	282 x 127 x 172.5 cm	282 x 152.4 x 176 cm	302.2 x 162.6 x 187.3 cm	320 x 162.6 x 182.1 cm
Ground Clearance	27.9 cm	31.8 cm	35.6 cm	36.8 cm
Seating Capacity	2	2	2	2
Fuel Capacity	35.9 L	35.9 L	35.9 L	45.4 L
Bed Box Dimensions (L x W x H)	52.5 x 94 x 20 cm	52.5 x 94 x 20 cm	72.0 x 57.0 x 17.8 cm	66 x 45 x 29.2 cm
Front/Rear Rack or Box Capacity	N.A. / 136 kg	N.A. / 136 kg	N.A. / 136 kg	N.A. / 136 kg
Payload Capacity	336 kg	336 kg	336 kg	336 kg
Hitch Towing Rating	680 kg	680 kg	N/A	N/A
Hitch Type	Standard 3.2 cm Receiver	Standard 3.2 cm Receiver	Not Equipped	Not Equipped
Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride®	Lock & Ride®
Lighting	Halogen 55W low/ 60W high & Red LED Tail/Brake Lights	Front Blacked Out Signature White LED Low/High with Accent Lights & Red LED Tail / Brake Lights	Signature White LED, Low/High & Red LED Tail / Brake Lights	White LED Low/High & Red LED Tail / Brake Lights
Electronic Power Steering	No	Yes	Standard with Quick Turn Rack	High Assist Electronic Power Steering with Quick Turn Rack; Race Inspir Steering Wheel
Instrumentation	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet + 12V Power Plug.	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/ Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Ta- chometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet + 12V Power Plug	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Select Blue/Red Backlighting & Brightness, Programmable Service Intervals, Sp ometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indic Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes Belt Reminder Light, Gear Indicator, DC Outlet
Other Standard Features	Adjustable Tilt Steering, Near Field Communication Technology	Adjustable Tilt Steering, Near Field Communication Technology, Polaris P.A.S.S.	Adjustable Tilt Steering	High Output 900w charging system with sealed electrical, Polaris Pulse sy In-Dash Charge Port, Polaris P.A.S.S.
_				

Colours White Lightning Ghost Gray

Ghost Gray

Cruiser Black

SPORT/RECREATIONAL









RZR PRO XP ULTIMATE - 64"

Sunset Red

Colours

RZR XP 4 1000 PREMIUM EPS - 64"

RZR PRO XP 4 SPORT - 64"

Ghost Gray

RZR PRO XP 4 ULTIMATE - 64"

SPECIFICATIONS

Engine Type	4-Stroke DOHC Twin Cylinder Turbocharged	4-Stroke DOHC Twin Cylinder	4-Stroke DOHC Twin Cylinder Turbocharged	4-Stroke DOHC Twin Cylinder Turbocharged
Displacement	925cc	999cc	925cc	925cc
Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
Cooling	Liquid	Liquid	Liquid	Liquid
Transmission/ Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
Drive System	Isolated Xtreme Performance True On-Demand AWD/2WD	High Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD
Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped
Front Suspension	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 43.2 cm Wheel Travel	Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 40.6 cm of Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 43.2 cm Wheel Travel	High-Clearance Dual A-Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 43.2 cm Wheel Travel
Rear Suspension	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Travel*, 50.8 cm Wheel Travel	Trailing Arm with Stabilizer Bar and 50.8 cm Usable Travel*, 45.7 cm of Wheel Travel	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar and 55.9 cm Usable Travel*, 50.8 cm Wheel Travel	Trailing Arm & Standard-Clearance Radius Rods with Stabilizer Bar ar 55.9 cm Usable Travel*, 50.8 cm Wheel Travel
Front/Rear Brakes	4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore XL Front and Dual-Bore Rear Calipers	4-Wheel Hydraulic Disc with Dual-Bore XL Front and Dual-Bore Rear Cali
Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission	Park in Transmission
Front Tyres	30 x 10-14 MAXXIS Carnivore (8-Ply); Wheel Size 14x6	29 x 9-14; Radial Tire	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x6	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x6
Rear Tyres	30 x 10-14 MAXXIS Carnivore (8-Ply); Wheel Size 14x7	29 x 11-14; Radial Tire	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x7	30 x 10-14 Maxxis Carnivore II; (8-ply rated); Wheel Size 14x7
Wheels	Cast Aluminum	Cast Aluminum	Cast Aluminum	Cast Aluminum
Wheelbase	244 cm	297.2 cm	317.5 cm	317.5 cm
Dry Weight	814 kg	762 kg	916 kg	937 kg
Overall Vehicle Size (L x W x H)	320 x 163 x 182 cm	370.8 x 162.6 x 187.3 cm	393.7 x 162.6 x 186.9 cm	393.7 x 162.6 x 186.9 cm
Ground Clearance	36.8 cm	35.6 cm	36.8 cm	36.8 cm
Seating Capacity	2	4	4	4
Fuel Capacity	45.4 L	35.9 L	49.2 L	49.2 L
Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm	72.0 × 57.0 × 17.8 cm	66 x 45 x 29.2 cm	66 x 45 x 29.2 cm
Front/Rear Rack or Box Capacity _	N.A. / 136 kg	N.A. / 136 kg	N.A. / 136 kg	N.A. / 136 kg
Payload Capacity	336 kg	408 kg	408 kg	408 kg
Hitch Towing Rating	N/A	N/A	N/A	N/A
Hitch Type	Not Equipped	Not Equipped	Not Equipped	Not Equipped
Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride®	Lock & Ride® Fold Flat Rear Storage, convertible rear seat storage w integrated tie down points, 70.4 x 134.1 x 49.53 cm
Lighting	Signature White LED, Low / High & Red LED Tail / Brake Lights; Front & Rear LED Accent Lights	Front Blacked Out Signature White LED Low/High w/ Accent Lights & Red LED Tail / Brake Lights	Signature White LED, Low/High & Red LED Tail / Brake Lights	Signature White LED, Low / High & Red LED Tail / Brake Lights; Front & LED Accent Lights; Interior Accent Lighting
Electronic Power Steering	High Assist Electronic Power Steering with Quick Turn Rack; Race inspired Steering Wheel with Tilt and Telescoping adjustment; Dynamix and Ride Command Push Button Controls	Standard with Quick Turn Rack	High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel	High Assist Electronic Power Steering with Quick Turn Rack; Race insp Steering Wheel with Tilt and Telescoping adjustment; Dynamix and R Command Push Button Controls
Instrumentation	RIDE COMMAND® 7° Glove-Touch Display: DYNAMIX 2.0 Visualizer, Built-In GPS, Group ride (cell-based or GPS based), Topographic Mapping, Bluetooth & USB Smartphone Connectivity, AM/FM & Weather Radio, In-Vehicle Communications Capable With Optional Sena Headsets, Rockford Fosgate Premium Audo (Including 2 Tweeters, 2 Front Speakers, and External 400W Amp) Dual-sweep Analog Dials w/ 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Digital Instrumentation: Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/ Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Ta- chometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet	Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Bauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator, Front and Rear DC Outlet	RIDE COMMAND® 7' Glove-Touch Display: DYNAMIX 2.0 Visualizer, Built-I Group ride (cell-based or GPS based). Topographic Mapping, Bluetooth Smartphone Connectivity, AMFH 8. Weather Radio, In-Vehicle Commu tions Capable With Optional Sena Headsets, Rockford Fosgate Premium (Including 2 Tweeters, 2 Front Speakers, and External 400W Amp) Dual- Analog Dials w/4 "LDD Rider Information Center: User Selectable Blue Backlighting & Brightness, Programmable Service Intervals. Digital Instr tation: Speedometer, Tachometer, Odometer, Tipmeter, Clock, House Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Ind and Codes, Seat Belt Reminder Light, Gear Indicator, DC Outlet
Other Standard Features	RIDE COMMAND® , High Output 900w charging system with sealed electrical, Polaris Pulse system, USB Charging, Front Bumper, In-Dash Charge Port, Cut & Sew Seats, Polaris P.A.S.S., Rockford Fosgate Stage 3 Audio.	Adjustable Tilt Steering, Front & Rear LED Accent Lights	High Output 900w charging system with sealed electrical, Polaris Pulse system, In-Dash Charge Port, Polaris P.A.S.S.	RIDE COMMAND® , High Output 900w charging system with sealed elec Polaris Pulse system, USB Charging, Front Bumper, In-Dash Charge Por Sew Seats, Polaris P.A.S.S., Rockford Fosgate Stage 3 Audio.

Onyx Black

Sunset Red







RZR TURBO R SPORT - 74"

RZR TURBO R ULTIMATE - 74"

RZR TURBO R 4 ULTIMATE- 74"

	Engine Type	4-Stroke DOHC Twin Cylinder Turbocharged	4-Stroke DOHC Twin Cylinder Turbocharged	4-Stroke DOHC Twin Cylinder Turbocharged
ENGINE	Displacement	925cc	925cc	925cc
ENG	Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	Electronic Fuel Injection
	Cooling	Liquid	Liquid	Liquid
S S	Transmission/ Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H
DRIVETRAIN	Drive System	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD	Isolated Xtreme Performance True On-Demand AWD/2WD
	Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Not Equipped / Not Equipped	Not Equipped / Not Equipped
NOISN	Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs
SUSPENSION	Rear Suspension	Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, and Stabilizer Bar and 71.9cm Usable Travel, 56.9cm Wheel Travel, Unitized Hubs	Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, and Stabilizer Bar and 71.9cm Usable Travel, 56.9cm Wheel Travel, Unitized Hubs	Tubular Trailing Arm with boxed gusseting and Toe Link, High Clearance Radius Rods, and Stabilizer Bar and 71.9cm Usable Travel, 56.9cm Wheel Travel, Unitized Hubs
BRAKES	Front/Rear Brakes	4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers; Aluminum Top Hat Rotor	4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers; Aluminum Top Hat Rotor	4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers; Aluminum Top Hat Rotor
B.	Parking Brake	Park in Transmission	Park in Transmission	Park in Transmission
Q S	Front Tyres	$32\mathrm{x}10\text{-}15$ Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
ESA	Rear Tyres	$32\mathrm{x}10\text{-}15$ Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7
Ę×	Wheels	Painted Cast Aluminum Rim with 5-Lug Pattern	Painted Cast Aluminum Rim with 5-Lug Pattern	Painted Cast Aluminum Rim with 5-Lug Pattern
	Wheelbase	244 cm	244 cm	317.5 cm
	Dry Weight	881 kg	913 kg	1,037 kg
S	Overall Vehicle Size (L x W x H)	325 x 188 x 189 cm	325 x 188 x 189 cm	340 x 188 x 196 cm
Ĕ	Ground Clearance	40.6 cm	40.6 cm	40.6 cm
APA(Seating Capacity	2	2	4
S/C	Fuel Capacity	45.4 L	45.4 L	49.2 L
DIMENSIONS / CAPACITIES	Bed Box Dimensions (L x W x H)	66 x 45 x 29.2 cm	66 x 45 x 29.2 cm	66 x 45 x 29.2 cm
DIME	Front/Rear Rack or Box Capacity	N.A. / 136 kg	N.A. / 136 kg	N.A. / 136 kg
	Payload Capacity	331 kg	331 kg	526 kg
	Hitch Towing Rating	N/A	N/A	N/A
	Hitch Type	Not Equipped	Not Equipped	Not Equipped
	Cargo System/Cab	Lock & Ride®	Lock & Ride®	Lock & Ride® Fold Flat Rear Storage, convertible rear seat storage with inte- grated tie down points, 70.4 x 134.1 x 49.53 cm
	Lighting -	Low/High & Red LED Tail / Brake Lights	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting
	Electronic Power Steering	Rack Mounted High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel with Tilt Adjustment	Rack Mounted High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel with Tilt and Telescoping Adjustment; DYMAMI DV with Integrated EPS Modes and Ride Command Push Button Controls	Rack Mounted High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel with Tilt and Telescoping Adjustment; DYNAMIX DV with Integrated EPS Modes and Ride Command Push Button Controls
FEATURES	Instrumentation	Dual-sweep Analog Dials w/ 4 in LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator	RIDE COMMAND™ 7° Glove-Touch Display: Built-In GPS, Mapping, Vehicle-to-Vehicle with "Group Ride, Follow the Leader, & Messaging, Bluetooth & USB Smartphone Connectivity, AMFM & Weather Radio, In-Vehicle Communications Capable With Diptional Sena Headsets, Rockford Fosgate Premium Audio, Including 2 Thuse-tere, and 2076 many Dulas-weep Analog Dials wide in LOD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals. Builtigal Instrumentation: Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light. Gear Indicator	RIDE COMMAND" 7" Glove-Touch Display: Built-in GPS, Mapping, Vehicle-to-Vehicle with "Group Ride, Follow the Leader, & Messaging, Bluetooth & USB Smartphone Connectivity, AMFM & Weather Radio, In-Vehicle Communications Capable With Diptional Sena Headests, Rockford Fosgate Premium Audio (Including) 2 Weeters, and 2 Front Speakers, and Extrant 400W Amp Dubla-weep Analog Blaks w 4 in LOD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals Digital Instrumentation: Speedments -Tachometer, Odometer, Tripmeter, Dock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator
	Other Standard Features	High Output 900w charging system, Polaris Pulse system, In-Dash Vehicle Charge Port, 2 DC Accy ports, Polaris P.A.S.S., Colored Toe Link, Mud and Rock Guards	RIDE COMMAND®, High Output 900W Charging System, Polaris Pulse System, In-Dash Charge Port, 2 front DC Accy ports, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link, Mud and Rock Guards	RIDE COMMAND®, High Output 900W Charging System, Polaris Pulse System, In-Dash Charge Port, 1 front DC Accy ports, 1 rear DC Accy port, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link, Mud and Rock Guards
	Colours	Onyx Black	Orange Madness	Orange Madness





RZR PRO R ULTIMATE - 74"

RZR PRO R 4 ULTIMATE - 74"

	Engine Type	4-Stroke DOHC Inline Four Cylinder	4-Stroke DOHC Inline Four Cylinder	
ENGINE	Displacement	1997cc	1997cc	
ENG	Fuel System / Battery	Electronic Fuel Injection	Electronic Fuel Injection	
	Cooling	Liquid	Liquid	
AIN	Transmission/ Final Drive	Automatic PVT P/R/N/L/H	Automatic PVT P/R/N/L/H	
DRIVETRAIN	Drive System	Pro Performance True 2WD/4WD/4WD Lock	Pro Performance True 2WD/4WD/4WD Lock	
DR	Engine Braking System / Active Descent Control	Not Equipped / Not Equipped	Not Equipped / Not Equipped	
NOISI	Front Suspension	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs	Light Weight Boxed Dual A-Arm with 3 piece Stabilizer Bar and 68.6 cm Usable Travel, 56.5 cm Wheel Travel, Unitized Hubs	
SUSPENSION	Rear Suspension	Boxed Trailing Arm with Toe Link, High-Clearance Radius Rods, and 3 piece Stabilizer Bar and 73.7cm Usable Travel, 62.2 cm Wheel Travel, Unitized Hubs	Boxed Trailing Arm with Toe Link, High-Clearance Radius Rods, and 3 piece Stabilizer Bar and 73.7cm Usable Travel, 62.2 cm Wheel Travel, Unitized Hubs	
BRAKES	Front/Rear Brakes 4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers; Aluminum Top Hat Rotor		4-Wheel Hydraulic Disc with Triple-Bore Front and Dual-Bore Rear Calipers; Aluminum Top Hat Rotor	
8	Parking Brake	Park in Transmission	Park in Transmission	
ES AND HEELS	Front Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	
ES.	Rear Tyres	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	32 x 10-15 Maxxis Rampage Fury; 8-Ply Rated; Wheel Size 15x7	
≥>	Wheels	Painted Cast Aluminum Rim with 5-Lug Pattern	Painted Cast Aluminum Rim with 5-Lug Pattern	
	Wheelbase	265.4cm	339.1cm	
	Dry Weight	992 kg	1,125 kg	
S	Overall Vehicle Size 347 x 188 x 185 cm		420 x 188 x 194 cm	
Ë	Ground Clearance	40.6 cm	40.6 cm	
APA	Seating Capacity	2	4	
S/C	Fuel Capacity	45.4 L	46.56 L	
DIMENSIONS / CAPACITIES	Bed Box Dimensions (L x W x H)	75 x 60.5 x 20.6 cm	75 x 60.5 x 20.6 cm	
DIME	Front/Rear Rack or Box Capacity	N.A. / 136 kg	N.A. / 136 kg	
	Payload Capacity 336 kg		408 kg	
	Hitch Towing Rating	N/A	N/A	
	Hitch Type	Not Equipped	Not Equipped	
	Cargo System/Cab	Lock & Ride® Factory Equipped Cargo Liner	Lock & Ride™; Convertible Fold Flat rear seat storage with integrated tie downs points, 70.4 x 134.1 x 49.53 cm Factory Equipped Cargo Liner	
	Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting	Signature White LED, Low/High & Red LED Tail / Brake Lights; Front, Rear, and Interior Accent Lighting	
	Electronic Power Steering	Rack Mounted High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel with Tilt and Telescoping Adjustment; DYNAMIX DV with Integrated EPS Modes and Ride Command Push Button Controls	Rack Mounted High Assist Electronic Power Steering with Quick Turn Rack; Race Inspired Steering Wheel with Tilt and Telescoping Adjustment; DYNAMIX DV with Integrated EPS Modes and Ride Command Push Button Controls	
FEATURES	Instrumentation	RIDE COMMAND" 7' Glove-Touch Display: Built-In GPS, Mapping, Vehicle-to-Vehicle with "Group Ride, Follow the Leader, & Messaging, Bluetooth & USB Smartphone Connectivity, AM/FM & Weather Radio, In-Vehicle Communications Capable With Optional Sena Headsets, Rockford Fosgate Premium Audio (Including 2 Tweeters, and 2 Front Speakers, and External 400W Ampl Dual-sweep Analog Dials w/ 4 in LCB Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals. Digital Instrumentation: Speedometer, Tachometer, Odometer, Tripmeter, Olok, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator	RIDE COMMAND™ 7" Glove-Touch Display: Built-In GPS, Mapping, Vehicle-to-Vehicle with "froup Ride, Follow the Leader, & Messaging, Bluetooth & USB Smartphone Connectivity, AMF/R & Weather Radio, In-Vehicle Communications Capable With Optional Sena Headsets, Rockford Fosgate Premium Audio (Including 2 Tweeters, and 2 Front Speakers, and External 400W Amp) Dual-sweep Analog Dials w 4 in LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Digital Instrumentation: Speedometer, Tachometer, Odometer, Tipineter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder Light, Gear Indicator	
	Other Standard Features	RIDE COMMAND®, High Output External 1700W Alternator, Polaris Pulse System, In-Dash Charge Port, Zfront DC Accy ports, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link, Hood Scoop, Mud and Rock Guards, User Selectable Throttle Modes (Sport, Rock, & Race)	RIDE COMMAND® , High Output External 1700W Alternator, Polaris Pulse System, In-Dash Charge Port, I front DC Accy ports, I rear DC Accy port, Polaris P.A.S.S., Painted Aluminum Roof, Colored Toe Link, Hood Scoop, Mud and Rock Guards, User Selectable Throttle Modes (Sport, Rock, & Race)	
	Calaura			

NOTES	











Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris Dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on published manufacturer specifications available at December 2022 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders and drivers. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3026. Printed December 2022.

PEJLARIS Think Outside