







RANGER

PCLARIS

THE FIRST CHOICE OF MORE AUSTRALIAN FARMERS



"Is Mid Size Your Size"



THE LARGEST RANGE OF SIDE BY SIDE VEHICLES IN AUSTRALIA







ELECTRIC Control of the second s - "Mark Larkham

MID-SIZE



QUAD BIKE



Mid-Size means it's a little shorter and a little narrower than the full-sized 3-seat range, but that also means it's more nimble, more manageable and more manoeuvrable.







WATCH NOW

FULL-SIZE

PCLARIS

GENUINE PARTS & ACCESSORIES "GET MORE DONE"




FOR YOUR COMFORT, SAFETY & PROTECTION



Mark Larkham talks about Polaris Genuine Accessories .

SOME OF OUR MOST POPULAR ACCESSORIES

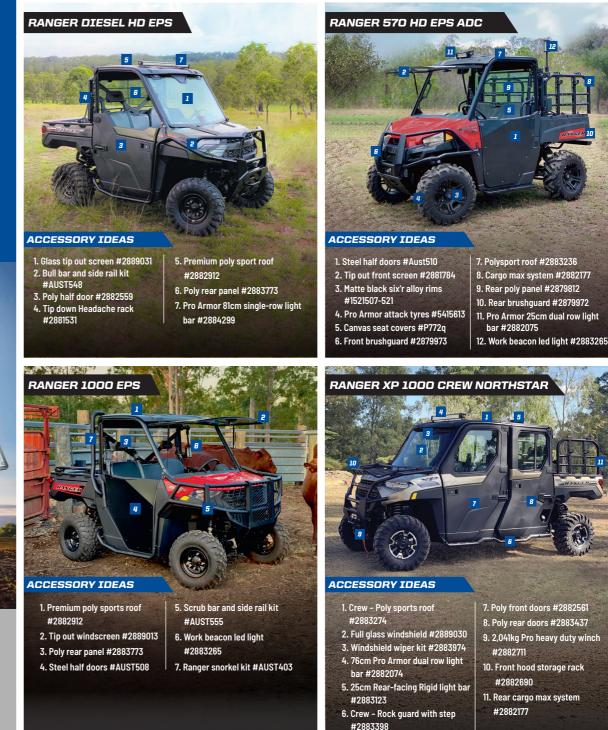

2023 MODEL LINE UP

RANGER

SIZE

OIW

32 HP

SP 530 /



SEAT BELT

INTERLOCK

DUMP BOX

CAPACITY

230KG

| STOL | 0 | | | 3 | | 0 | | | |
|--|---|-------|--|------------------------|---------------------------------|---------------------------------|-------|--|------------------------|
| ON DEMAND TRUE ALL- WHEEL-DRIVE (AWD) | ATS 2 DUMP BOX CAPACITY - 227 KG | 44 HP | ON DEMAND TRUE ALL-WHEEL- DRIVE (AWD) | VERSATRAC TURF MODE | IRS WITH 25.4CM OF TRAVEL | DUMP BOX CAPACITY - 227KG | 44 HP | ON DEMAND TRUE ALL-WHEEL- DRIVE (AWD) | VERSATRAC TURF MODE |



2023 MODEL LINE UP



3

POLARIS RANGER SPECSE FEATURES



USING YOUR SXS VEHICLE SAFELY

A message from Polaris about how to use your SxS vehicle safely.

Polaris has engineered the most capable utility and recreational off-road vehicles packed with safety technology such as Engineered Roll Over Protection (ROPS) Roll Cages, Active Decent Control (ADC), True On Demand All Wheel Drive and more. However when operating a side by side vehicle off-road, the Driver/User and passengers must ensure that they operate the vehicle safely. Here are a few Tips and Hints on how to enjoy your Side by side vehicle safely.

TIPS



Always wear a seat belt. Most injuries occur from passengers or limbs being ejected from the vehicle during an accident. Seat belts are your best friend.



An appropriate helmet is recommended for all occupants (Driver & Passengers). The more passengers in a vehicle, the more likelihood of "head to head" impacts.





- Be aware of HIGH RISK situations such as sloping and hilly Terrain.
- Slow is best when navigating hilly or obstructed terrain.
- In these higher risk situations always use LOW RANGE.



Overloading – Your Polaris is designed to carry a certain maximum load (which varies from model to model). Never exceed the maximum load and remember a loaded vehicle may handle and respond differently to an empty vehicle.



Be aware of your vehicle condition. In particular it is a good habit throughout your driving day to visually check that your tyres are correctly inflated and you have not picked up a puncture or have a partially inflated tyre. Correct tyre pressures are important for traction and handling.

ALWAYS WEAR A HELMET, SEAT BELT AND USE SAFETY NETS OR DOORS FOR YOUR PROTECTION







Helmet

Seat Belt

Safety Nets

Doors

MID-SIZE

*2022 colour shown with optional genuine accessories fitted.

RANGER SP 570 EPS PREMIUM

RANGER

57Q



345454545454545

0

M CON

*2022 colour shown with optional genuine accessories fitted.

RANGER XP 1000 HD EPS ADC



*Shown with optional genuine accessories fitted.

RANGER DIESEL HD EPS ADC

RANGER



SOP

0

RANGER CREW XP 1000 NORTHSTAR PREMIUM

RANGER

SPECIFICATIONS

| | | RANGER SP 530 | RANGER 570 HD EPS ADC | RANGER SP 570 PREMIUM | RANGER SP 570 NORTHSTAR | |
|-----------------------------|---|---|--|---|---|--|
| | Engine Type | 4-Stroke Single Cylinder DOHC | 4-Stroke Single Cylinder DOHC | 4-Stroke Single Cylinder DOHC | 4-Stroke Single Cylinder DOHC | |
| ENGINE | Displacement | 567cc | 567cc | 567cc | 567cc | |
| ENG | Fuel System / Battery | Electronic Fuel Injection | Electronic Fuel Injection | Electronic Fuel Injection | Electronic Fuel Injection | |
| | Cooling | Liquid | Liquid | Liquid | Liquid | |
| AIN | Transmission/ Final Drive | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | |
| VETR | Drive System | On-Demand True AWD/2WD/VersaTrac Turf Mode | On-Demand True AWD/2WD/VersaTrac Turf Mode | On-Demand True AWD/2WD/VersaTrac Turf Mode | On-Demand True AWD/2WD/VersaTrac Turf Mode | |
| DRIVETRAIN | Engine Braking System / Active Descent Control | Not Equipped / Not Equipped | ADC Equipped | Not Equipped/Not Equipped | Not Equipped/Not Equipped | |
| TYRES AND BRAKES SUSPENSION | Front Suspension | MacPherson Strut 22.9 cm Travel | MacPherson Strut 22.9 cm Travel | MacPherson Strut 22.9 cm Travel | MacPherson Strut 22.9 cm Travel | |
| SUSPE | Rear Suspension | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 25.4 cm Travel | |
| AKES | Front/Rear Brakes | 4-Wheel Hydraulic Disc | 4-Wheel Hydraulic Disc with Dual-Bore Front Calipers | 4-Wheel Hydraulic Disc | 4-Wheel Hydraulic Disc | |
| BR/ | Parking Brake | Park in Transmission | Hand-Actuated | Park in Transmission | Park in Transmission | |
| LS N | Front Tyres | 25 x 8-12; Carlisle 489 | 25 x 8-12; Carlisle 489 | 25 x 8-12; Carlisle 489 | 25 x 8-12; Carlisle Terra Cross | |
| HEE | Rear Tyres | 25 x 10-12; Carlisle 489 | 25 x 10-12; Carlisle 489 | 25 x 10-12; Carlisle 489 | 25 x10-12; Carlisle Terra Cross | |
| 5≤ | Wheels | Stamped Steel | Aluminium Black Xcelerator | 12" Black Aluminum | 12" Black Aluminum | |
| | Wheelbase | 185.4 cm | 185.4 cm | 185.4 cm | 185.4 cm | |
| | Dry Weight | 525 kg | 501 kg | 564 kg | 670 kg | |
| ន | Overall Vehicle Size (L x W x H) | 274.3 x 142.2 x 188 cm | 279 x 147 x 185 cm | 274.3 x 142.2 x 188 cm | 274.3 x 147.3 x 188 cm | |
| CITIE | Ground Clearance | 27.9 cm | 26.7 cm | 27.9 cm | 26.7 cm | |
| CAPA | Seating Capacity | 2 | 2 | 2 | 2 | |
| NS / 0 | Fuel Capacity | 35.9 L | 34.1L | 35.9 L | 35.9 L | |
| ISIO | Bed Box Dimensions (L x W x H) | 84.6 x 123.7 x 31.2 cm | 81 x 107 x 29 cm | 84.6 x 123.7 x 31.2 cm | 84.6 x 123.7 x 31.2 cm | |
| DIMENSIONS / CAPACITIES | Front/Rear Rack or Box Capacity | N.A / 227 kg | N.A / 227 kg | N.A / 227 kg | N.A / 227 kg | |
| | Payload Capacity | 453 kg | 454 kg | 420 kg | 318 kg | |
| | Hitch Towing Rating | 680 kg | 680 kg | 680 kg | 680 kg | |
| | Hitch Type | Standard 5 cm Receiver | Standard 5 cm Receiver | Standard 5 cm Receiver | Standard 5 cm Receiver | |
| | Cargo System/Cab | Lock & Ride | Lock & Ride | Lock & Ride | Lock & Ride | |
| | Lighting | 55W Headlight, LED Taillamps | 50W Headlight, LED Taillight | High/Low Beam LED Headlights LED Taillamps | Halogen Headlamps, 55W low beam, 60W high beam, LED Taillamps | |
| | Electronic Power Steering | Not Equipped | Standard | Standard | Standard | |
| JRES | Adjustable Driver's Seat | Not Equipped | Not Equipped | Not Equipped | Not Equipped | |
| FEATURES | Tilt Steering | Standard | Standard | Standard | Standard | |
| | Instrumentation | 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | Single Analog Dial with 2" LCD Rider Information Center: Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seatbelt Reminder Light, DC Outlet | 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | |
| | Other Standard Features | Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 340 CCA Battery, 660W Charging System (Stator) | N.A | Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator) | All great features of SP 570 Premium plus: Polaris HD 3,500 Lb. Synthetic Rope Winch with Autostop and In-Dash Switch, Premium Pro-Shield Cab, Doors with Crank Windows, Integrated Door Storage | |
| | Colours | Sage Green | Bronze Mist | Pursuit Camo | Grey | |

N

SPECIFICATIONS

| | RANGER 1000 EPS | RANGER 1000 PREMIUM | RANGER XP 1000 HD EPS ADC | RANGER DIESEL HD EPS ADC |
|---|---|---|---|---|
| Engine Type | 4-Stroke Twin Cylinder SOHC | 4-Stroke Twin Cylinder SOHC | 4-Stroke Twin Cylinder DOHC | Kubota 3-Cylinder Diesel |
| Displacement | 999cc | 999cc | 999cc | 898cc |
| Fuel System / Battery | Electronic Fuel Injection | Electronic Fuel Injection | Electronic Fuel Injection | Mechanical Injection |
| Cooling | Liquid | Liquid | Liquid | Liquid |
| Transmission/ Final Drive | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H / L / N / R / P; Shaft |
| Drive System | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode | On-Demand True AWD/2WD/Versatrac Turf Mode |
| Engine Braking System / Active Descent Control | Not Equipped/Not Equipped | Not Equipped/ Not Equipped | Engine Breaking & ADC Equipped | ADC Equipped |
| Front Suspension | Dual A-Arm 25.4 cm Travel | Dual A-Arm 25.4 cm Travel | Dual A-Arm 27.9 cm Travel | Dual A-Arm with Stabilizer Bar 27.9 cm Travel |
| Front Suspension Rear Suspension | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 27.9 cm Travel | Dual A-Arm IRS with Stabilizer Bar 27.9 cm Travel |
| Front/Rear Brakes | 4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers | 4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers | 4-Wheel Hydraulic Disc with Dual-Bore Front Calipers | Hydraulic Disc |
| Parking Brake | Park in Transmission | Park in Transmission | Hand-Actuated | Hand-Actuated |
| g Front Tyres | 25 x 10-12; Carlisle 489 | 26 x 9-12; PXT 2.0 | 27 x 9-14; Pro Armor X-Terrain | 27 x 9; R12 |
| Rear Tyres | 25 x 11-12; Carlisle 489 | 26 x 11-12; PXT 2.0 | 27 x 11-14; Pro Armor X-Terrain | 27 x 11; R12 |
| Wheels | Stamped Steel | Aluminum Black Xcelerator 2.0 | 14" Aluminum | 12" Steel |
| Wheelbase | 206 cm | 206 cm | 206 cm | 206 cm |
| Dry Weight | 674 kg | 674 kg | 737 kg | 766 kg |
| Overall Vehicle Size (L x W x H) | 305 x 158 x 193 cm | 305 x 158 x 193 cm | 305 x 158 x 196 cm | 305 x 158 x 196 cm |
| (L x W x H) Ground Clearance | 30.5 cm | 31.8 cm | 33 cm | 33 cm |
| Seating Capacity | 3 | 3 | 3 | 3 |
| Fuel Capacity | 43 L | 43 L | 43.5 L | 43.5 L |
| Bed Box Dimensions (L x W x H) | 93.3 x 137.8 x 31.75 cm | 93.3 x 137.8 x 31.75 cm | 93.3 x 137.8 x 31.75 cm | 93.3 x 137.8 x 31.75 cm |
| Front/Rear Rack or Box Capacity | N.A / 454 kg | N.A / 454 kg | N.A / 454 kg | N.A / 435 kg |
| Payload Capacity | 680 kg | 680 kg | 680 kg | 720 kg |
| Hitch Towing Rating | 680 kg | 1,134 kg | 1,134 kg | 1,134 kg |
| Hitch Type | Standard 5 cm Receiver | Standard 5 cm Receiver | Standard 5 cm Receiver | Receiver w/ ECE R55 ball |
| Cargo System/Cab | Lock & Ride | Lock & Ride | Lock & Ride | Lock & Ride |
| Lighting | Halogen Headlamps, 55W Low Beam, 60W High Beam, Dual LED Taillamps | Dual LED Headlamps, 600Im Low Beam, 1000Im High Beam, Dual LED Taillamps | Dual LED Headlamps, 1250 Im Low Beam, 2300 Im High Beam, Dual LED Taillamps | Headlights : halogen |
| Electronic Power Steering | Standard | Standard | Standard | Standard |
| Adjustable Driver's Seat | Not Equipped | Standard | Standard | N.A |
| Tilt Steering | Standard | Standard | Standard | N.A |
| Instrumentation | 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | Dual-sweep Analog Dials w/ 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 1 DC Outlet, 1 USB Charge Port | All Digital Gauge, Speedometer, Odometer, Tachometer, 2 Trip Meters, Hour Meter, Gear Indicator, Fuel Gauge, Engine Temperature, Hi-Temp Light, Clock, Glow Plug Indicator, Low Oil Pressure Indicator, Seat Belt Indicator, Parking Brake Engaged Alarm, Horn, Backup Alarm |
| - Other Standard Features | Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port | Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port | Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents | N.A |
| Colours | Sage Green | Springfield Blue | Bronson Rock Smoke | Sage Green |

SPECIFICATIONS







RANGER XP 1000 NORTHSTAR PREMIUM RANGER XP KINETIC PREMIUM RANGER XP KINETIC ULTIMATE Interior Permanent Magnet AC Motor 4-Stroke Twin Cylinder DOHC Interior Permanent Magnet AC Motor Engine Type 999cc ΝΔ ΝΔ Displacement Lithium-Ion, 14.9 kWh Nominal Lithium-Ion, 29.8 kWh Nominal Fuel System / Battery Electronic Fuel Injection Cooling l iquid Active Air and Liquid Active Air and Liquid Transmission/ Final Drive Automatic PVT H/L/N/R/P: Shaft Gates Synchronous Belt H/L/N/P (Electronic Forward/Reverse), Shaft Gates Synchronous Belt H/L/N/P (Electronic Forward/Reverse), Shaft Drive System High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode High Performance On-Demand True AWD/2WD/ VersaTrac Turf Mode High Performance On-Demand True AWD/2WD/ VersaTrac Turf Mode Engine Braking System / Active Not Equipped / Not Equipped Regenerative Braking / Not Equipped Regenerative Braking / Not Equipped Descent Control Dual A-Arm 27.9 cm Travel Dual A-Arm 25.4 cm Travel Dual A-Arm 25.4 cm Travel Front Suspension Dual A-Arm, IRS 25.4 cm Travel Dual A-Arm, IRS 27.9 cm Travel Dual A-Arm, IRS 25.4 cm Travel **Rear Suspension** 4-Wheel Hydraulic Disc with Dual-Bore Front Callipers Front/Rear Brakes 4-Wheel Hydraulic Disc with Dual-Bore Front Calipers 4-Wheel Hydraulic Disc with Dual-Bore Front Callipers Parking Brake Park in Transmission Park In-Transmission Park In-Transmission Front Tyres 27 x 9-14; Pro Armor X-Terrain 29 X 9-14; PRO ARMOR X-TERRAIN; 8-Ply Rated 29 X 9-14; PRO ARMOR X-TERRAIN; 8-Ply Rated Rear Tyres 27 x 11-14. Pro Armor X-Terrain 29 x 11-14 · PRO ARMOR X-TERRAIN · 8-Ply Rated 29 x 11-14: PRO ARMOR X-TERRAIN: 8-Ply Rated Wheels 35.6 cm Aluminum 35.6 cm Aluminum 14" Aluminum Wheelbase 206 cm 206 cm 206 cm Dry Weight 867 kg 785 kg - vehicle weight subject to change 900 kg - vehicle weight subject to change **Overall Vehicle Size** 305 x 165 x 198 cm 305 x 158 x 198 cm 305 x 158 x 198 cm (L x W x H) Ground Clearance 33 cm 35.5 cm 35.5 cm Seating Capacity 3 3 3 43.5 L N.A Fuel Capacity N.A Bed Box Dimensions 93.3 x 137.8 x 31.75 cm 93.3 x 137.8 x 31.75 cm 93.3 x 137.8 x 31.75 cm (L x W x H) Front/Rear Rack 454 kg N.A / 567 kg N.A / 567 kg or Box Capacity 578 kg Payload Capacity 680 ka 680 ka **Hitch Towing Rating** 1,134 kg 1,134 kg 1,134 kg Hitch Type Standard 5 cm Receiver Standard 5 cm Receiver Standard 5 cm Receiver Lock & Ride Lock & Ride® Lock & Ride Cargo System/Cab Dual LED Headlamps, 1250Im low beam, 2300Im high beam, LED Front Accent Light with Charge Indicator, Dual LED Taillamps Dual LED Headlamps, 1250Im low beam, 2300Im high beam, LED Front Accent Light with Charge Indicator, Dual LED Taillamps Dual LED Headlamps, 1250lm Low Beam, 2300lm High Beam, Dual LED Taillamps Liahtina Standard Electronic Power Steering Standard Standard Adjustable Driver's Seat Standard Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding Standard N.A Tilt Steering N.A Center Mounted 7' Glove Touch Display with FV Infotainment (includes Range Remaining, Battery State of Charge, Charging Status, Launch Indicator, System Diagnostics and more), Speed Limiting, Plow Mode, Driver's Side Dual-sweep Analog Dials w/ 4" Multi-Color LCD Rider Information Center; Power Use and Regen %, Battery *Group Ride, *GPS Navigation, Air Temp., Bluetooth, AM/FM Radio, Driver's Side Dual-sweep Analog Dials w/ Dual-sweep Analog Dials w/ 4" LCD Rider Information Center: User Selectable Blue/Red State of Charge %, Range Remaining, Charging Rate, Battery Temperature, Motor Temperature, Accessory Voltage, 4" Multi-Color LCD Rider Information Center: Power Use and Regen %, Battery State of Charge %, Range Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Speedometer, Odometer, Tripmeter, Gear Indicator, Service Indicator and Codes, Programmable Service Intervals, Seat Remaining, Charging Rate, Battery Temperature, Motor Temperature, Accessory Voltage, Speedometer, Instrumentation Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Belt Reminder, User Selectable Backlighting & Brightness, Clock, Premium Cut & Sew Seats with Contoured Seatbacks Odometer, Tripmeter, Gear Indicator, Service Indicator and Codes, Programmable Service Intervals, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents, Polaris Pulse Electrical System (6 Seat Belt Reminder, User Selectable Backlighting & Brightness, Clock, Premium Cut & Sew Seats with position), DC Outlets, Dual USB Port, Cargo Box Located 12V SAE Port with In-Dash On/Off Switch Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents,

DIMENSIONS / CAPACITIES

DRIVETRAIN

SUSPEN-SION

BRAKES

Colours

Other Standard Features

Polaris HD 4,500 Lb, Synthetic Rope Winch with Autostop and Wireless Remote, Premium Pro-Shield Cab

Doors with Crank Windows, Fixed Glass Windshield with Wiper

Azure Crystal Metallic

Premium Steering Wheel and Interior Accents

Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding.

Ice White Pearl

change

2

subject

*Specifications

ENGINE

DRIVETRAIN

TYRES AND BRAKES SUSPENSION

DIMENSIONS / CAPACITIES

FEATURES

SPECIFICATIONS

| BRICOLI | JRE/UTILITY | | | SPECIFICATIONS |
|---|---|---|---|--|
| | | | | |
| | RANGER CREW SP 570 PREMIUM | RANGER CREW 1000 PREMIUM | RANGER CREW XP 1000 PREMIUM | RANGER CREW XP 1000 NORTHSTAR PREMIUM |
| Engine Type | 4-Stroke Single Cylinder DOHC | 4-Stroke Twin Cylinder SOHC | 4-Stroke Twin Cylinder DOHC | 4-Stroke Twin Cylinder DOHC |
| Displacement | 567cc | 999cc | 999cc | 999cc |
| Fuel System / Battery | Electronic Fuel Injection | Electronic Fuel Injection | Electronic Fuel Injection | Electronic Fuel Injection |
| Cooling | Liquid | Liquid | Liquid | Liquid |
| Transmission/ Final Drive | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft | Automatic PVT H/L/N/R/P; Shaft |
| Drive System | On-Demand True AWD/2WD/VersaTrac Turf Mode | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode | High Performance On-Demand True AWD/2WD/VersaTrac Turf Mode |
| Engine Braking System / Active Descent Control | Not Equipped / Not Equipped | Not Equipped / Not Equipped | Not Equipped / Not Equipped | Not Equipped / Not Equipped |
| Front Suspension | MacPherson Strut 22.9 cm Travel | Dual A-Arm 25.4 cm Travel | Dual A-Arm 27.9 cm Travel | Dual A-Arm 27.9 cm Travel |
| Rear Suspension | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 25.4 cm Travel | Dual A-Arm, IRS 27.9 cm Travel | Dual A-Arm, IRS 27.9 cm Travel |
| Front/Rear Brakes | 4-Wheel Hydraulic Disc | 4-Wheel Hydraulic Disc with Dual-Bore Front and Rear Calipers | 4-Wheel Hydraulic Disc with Dual-Bore Front Calipers | 4-Wheel Hydraulic Disc with Dual-Bore Front Calipers |
| Parking Brake | Park in Transmission | Park in Transmission | Park in Transmission | Park in Transmission |
| Front Tyres | 25 x 8-12; Carlisle 489 | 26 x 9-12; PXT 2.0 | 27 x 9-14; Pro Armor X-Terrain | 27 x 9-14; Pro Armor X-Terrain |
| Rear Tyres | 25 x 10-12; Carlisle 489 | 26 x 11-12; PXT 2.0 | 27 x 11-14; Pro Armor X-Terrain | 27 x 11-14; Pro Armor X-Terrain |
| Wheels | 12" Black Aluminum | Aluminum Black Xcelerator 2.0 | 35.6 cm Aluminum | 35.6 cm Aluminum |
| Wheelbase | 266.7 cm | 287 cm | 287 cm | 287 cm |
| Dry Weight | | 814 kg | 859 kg | 1,063 kg |
| Overall Vehicle Size (L x W x H) | 365.8 x 142.2 x 188 cm | 386 x 158 x 193 cm | 386 x 158 x 196 cm | 386 x 165 x 198 cm |
| Ground Clearance | 27.9 cm | 31.8 cm | 33 cm | 33 cm |
| Seating Capacity | 4 | 6 | 6 | 6 |
| Fuel Capacity | 35.9 L | 43 L | 43.5 L | 43.5 |
| Bed Box Dimensions (L x W x H) | 84.6 x 123.7 x 31.24 cm | 93.3 x 137.8 x 31.75 cm | 93.3 x 137.8 x 31.75 cm | 93.3 x 137.8 x 31.75 cm |
| Front/Rear Rack or Box Capacity | N.A / 227 kg | N.A / 454 kg | 454 kg | 455 kg |
| Payload Capacity | 499 kg | 794 kg | 767 kg | 558 kg |
| Hitch Towing Rating | 680 kg | 1,134 kg | 1,134 kg | 1,134 kg |
| Hitch Type | Standard 5 cm Receiver | Standard 5 cm Receiver | Standard 5 cm Receiver | Standard (5 cm Receiver |
| Cargo System/Cab | Lock & Ride | Lock & Ride | Lock & Ride | Lock & Ride |
| Lighting | High/Low Beam LED Headlights LED Taillamps | Dual LED Headlamps, 600Im Low Beam, 1000Im High Beam, Dual LED Taillamps | Dual LED Headlamps 1250Im Low Beam 2300Im High Beam Dual LED Taillamps | Dual LED Headlamps, 1250Im Low Beam, 2300Im High Beam, Dual LED Taillamps |
| Electronic Power Steering | Standard | Standard | Standard | Standard |
| Adjustable Driver's Seat | Not Equipped | Standard | Standard | Standard |
| Tilt Steering | Standard | Standard | Standard | Standard |
| Instrumentation | 4° LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | 4" LCD Rider Information Center: User Selectable Blue/Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, DC Outlet | Dual-sweep Analog Dials w/ 4° LCD Rider Information Center: User Selectable Blue/ Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1USB Charge Port | Dual-sweep Analog Dials w/ 4* LCD Rider Information Center: User Selectable Blue/ Red Backlighting & Brightness, Programmable Service Intervals, Speedometer, Tachometer, Odometer, Tripmeter, Clock, Hour Meter, Gear Indicator, Fuel Gauge, Coolant Temperature, Voltmeter, Service Indicator and Codes, Seat Belt Reminder, 2 DC Outlets, 1 USB Charge Port |
| Other Standard Features | Gas Assist Dump Box, Single Latch Tailgate, Rear-mounted Fiberglass Insulated Exhaust System, Standard In-dash SAE Charge Port, 575 CCA Battery, 660W Charging System (Stator) | Premium Cut & Sew Seats, Polaris Pulse Electrical System (3 position), Standard In-Dash SAE Charge Port. | Premium Cut & Sew Seats with Contoured Seatbacks and Embroidered Polaris Branding, Premium Steering Wheel and Interior Accents, Polaris Pulse Electrical System (6 position), Standard In-Dash SAE Charge Port, NFC Front Badge | Polaris HD 4,500 Lb. Synthetic Rope Winch with Autostop and Wireless Remote, Premium Pro-Shield Cab, Doors with Crank Windows, Fixed Glass Windshield with Wiper , Rear Glass Panel |

Colours

Ghost Gray

Springfield Blue

Bronson Rock Smoke

Azure Crystal Metallic







www.polarisaustralia.com

🞯 /polarisorv_aus 🛛

Ғ / PolarisAustralia 🛛

f / Team RZR

Polaris reserves the right to withdraw any product from sale or change specifications and pricing without notice. Confirm model specifications and availability with your Polaris Dealer prior to ordering. The Polaris range is not intended for and may not be registered for on-road use. All competitive comparisons are based on published manufacturer specifications available at December 2022 unless otherwise specified. See other manufacturers for latest specifications. All photography taken with professional riders and drivers. For your safety, always operate Polaris products as instructed in the product manual and on warning labels. Never carry passengers on any product not designed for such use. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others. Avoid excessive speeds and be particularly careful on difficult terrain. ©Polaris Sales Australia Pty Ltd ABN 62 088 081 949, Registered Office: 36 Grimes Court, Derrimut, VIC 3026. Printed December 2022.